

**FEATURES :**

- 3PIN SIP Package
- Pin-out compatible with LM78XX Linear
- Efficiency up to 95%, Non isolated, no need for heatsinks
- UL94V-0 package material
- Operating temperature from -40°C to +85°C
- No-load input current as low as 0.3mA
- Short circuit protection
- UL/cUL/IEC/EN 62368-1 approved, CB-Report



Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Input Range	Output Voltage	Output Current	Efficiency (%)		Capacitive Load
	Vdc	Vdc	mA	Min.Vin	Max.Vin	μF max
01DC-1R2-500(L)	4.75-36	1.2	500	74	62	1000
	4.75-25	-1.2	-400	62	60	470
01DC-1R5-500(L)	4.75-36	1.5	500	78	65	1000
	4.75-25	-1.5	-400	65	63	470
01DC-1R8-500(L)	4.75-36	1.8	500	82	69	1000
	4.75-25	-1.8	-400	69	68	470
01DC-2R5-500(L)	4.75-36	2.5	500	87	75	1000
	4.75-25	-2.5	-400	74	73	470
01DC-3R3-500(L)	4.75-36	3.3	500	90	78	1000
	4.75-25	-3.3	-400	75	78	470
01DC-05-500(L)	6.5-36	5.0	500	92	84	1000
	6.5-27	-5.0	-500	78	83	470
01DC-6R5-500(L)	9.0-36	6.5	500	93	86	1000
	6.5-25	-6.5	-300	82	84	470
01DC-09-500(L)	12-36	9.0	500	95	90	1000
	7.0-23	-9.0	-200	85	86	470
01DC-12-500(L)	15-36	12	500	95	92	1000
	7-20	-12	-200	83	87	470
01DC-15-500(L)	18-36	15	500	95	93	1000
	7-18	-15	-200	81	87	470

Note:(L) Add a suffix to bend the feet 90°, e.g. 01DC-05-500L

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance			2	±3	%
Short Circuit Protection	Continuous, automatic recovery				
Line Regulation	1.2V to 1.5V			0.3	%
Line Regulation	1.8V to 15V			0.3	%
Load Regulation	1.2V to 1.5V (10% To 100% F.L)			0.6	%
Load Regulation	1.8 V to 15V (10% To 100% F.L)		0.4	0.6	%
Ripple & Noise (without Output Capacitor)	1.2V to 6.5V (BW=DC To 20MHz)			75	mVp-p
	9V to 15V (BW=DC To 20MHz)			100	mVp-p
Transient response setting time	50% load step change		250		us
Maximum operating altitude	5000M				

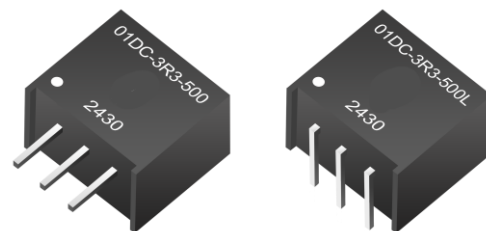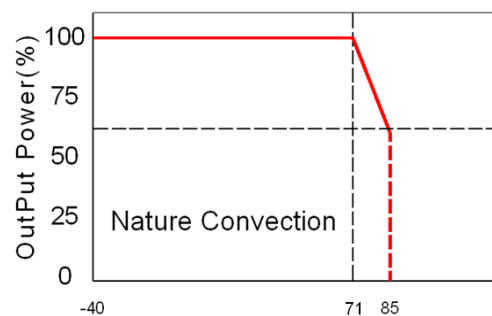Volgen**DC-DC Converter****01DC-500 SERIES****Non-Isolated****Single Output****0.45"*0.3"*0.4"**CB
SchemecUL[®]US**Temperature Derating Graph****CONTACT US**

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen


Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)		
	RE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)		
EMS	ESD	IEC/EN61000-4-2	Contact $\pm 4\text{kV}$	perf. Criteria B
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	$\pm 1\text{kV}$	perf. Criteria B
	Surge	IEC/EN 61000-4-5	line to line $\pm 1\text{kV}$	perf. Criteria B
	CS	IEC/EN 61000-4-6	3Vr.m.s	perf. Criteria A

General Specifications

Parameters	Conditions	Min	Typ	Max	Units
Switching Frequency			440		KHz
Operating Temperature		-40		85	$^{\circ}\text{C}$
Storage Temperature		-55		125	$^{\circ}\text{C}$
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	Non-Conductive Black Plastic				
Weight			2.0		g
Dimensions			11.6x7.6x10.4		mm
MTBF(+25 $^{\circ}\text{C}$)	using MIL-HDBK 217F		5000x10 ³		hours
MTBF(+71 $^{\circ}\text{C}$)	using MIL-HDBK 217F		1000x10 ³		hours

Packing Formation

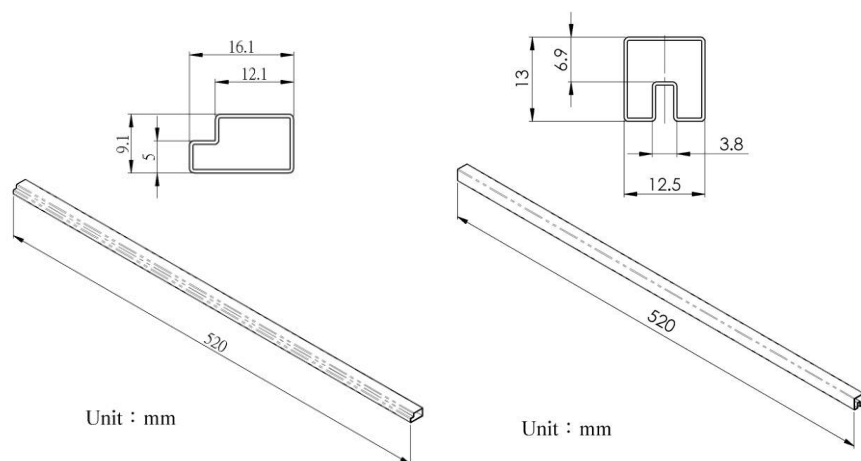

Weight	:	2.0 grams/pcs
Tube	:	43 pcs

Part Number

01DC - 05 - 500
A B C

A: Series

B: Output Voltage

C: Output Current

EMC (CLASS B) Compliance Circuit


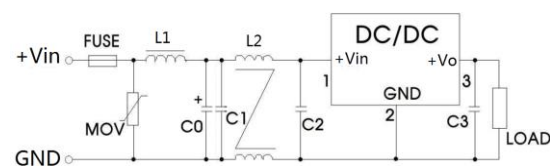


Fig.1

FUSE	Select fuse value according to actual input current
MOV	S20K30
L1	82 μH
C0	680 μF /50V
L2	4.7mH
C1,C3,C4	4.7 μF /50V
C2	10 μF /50V

Recommended Test Circuit

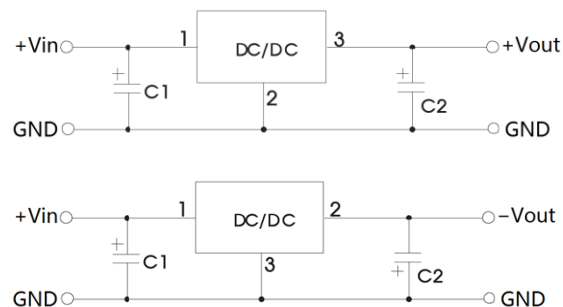

Vout	C1	C2
1.2	10 μF /50V	22 μF /10V
1.5		22 μF /10V
1.8		22 μF /10V
2.5		22 μF /10V
3.3		22 μF /10V
5		22 μF /10V
6.5		22 μF /16V
9		22 μF /16V
12		22 μF /25V
15		22 μF /25V


CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131


Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen

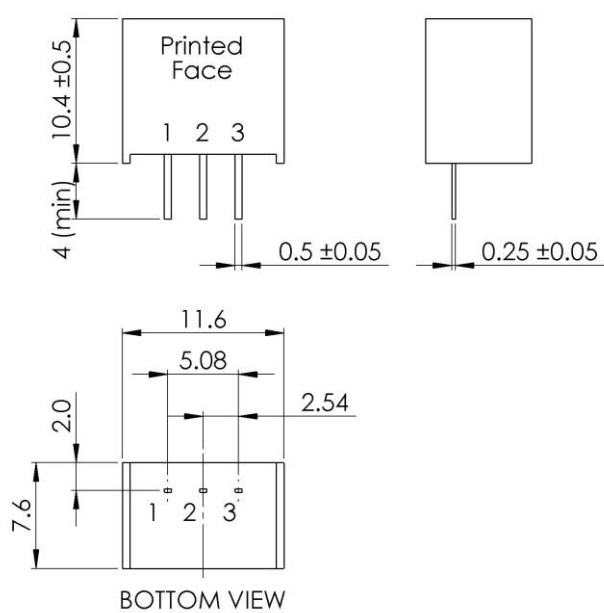

Unit : mm
Tolerance : XX.X ± 0.5 , XX.XX ± 0.25

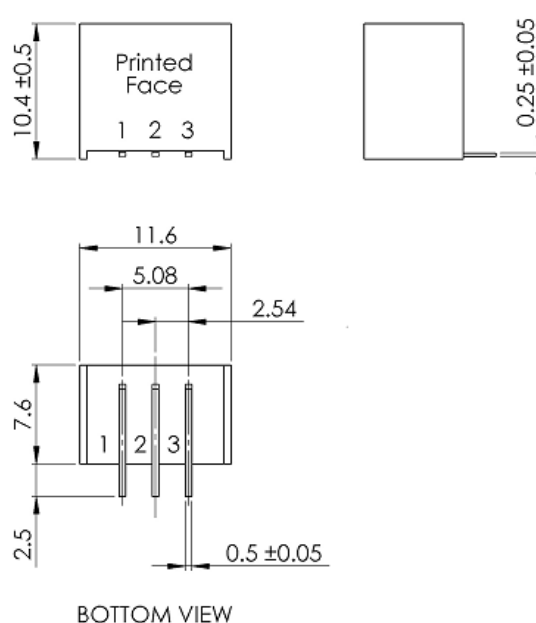

Unit : mm
Tolerance : XX.X ± 0.5 , XX.XX ± 0.25

PIN Connection

PIN	1	2	3
SINGLE	+Vin	GND	+Vout

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen