

**FEATURES:**

- 7PIN SIP Package
- No-load input current as low as 5mA
- Continuous short-circuit protection
- High Efficiency up to 87%
- Unregulated Output Types
- 1.5KVDC ~ 6KVDC Isolation
- Operating Temperature:-40°C to +105°C
- Industry Standard Pinout
- UL/cUL/IEC/EN 62368-1 approved, CB-Report
- EMC Standard of EMI EN55032:2015 Approved
- EMC Standard of EMS EN55035:2017 Approved

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency	Capacitive Load(μF)
	Vdc	mA	%TYP	Max.
12DC-YY03NP(H3)	3.3	303	76	2400
12DC-YY05NP(H3)	5	200	82	2400
12DC-YY09NP(H3)	9	112	83	1000
12DC-YY12NP(H3)	12	84	84	470
12DC-YY15NP(H3)	15	67	84	330
12DC-YY24NP(H3)	24	42	85	100
12DC-YYD03NP(H3)	±3.3	±151	76	±1200
12DC-YYD05NP(H3)	±5	±100	82	±1200
12DC-YYD09NP(H3)	±9	±56	83	±470
12DC-YYD12NP(H3)	±12	±42	84	±220
12DC-YYD15NP(H3)	±15	±34	84	±220
12DC-YYD24NP(H3)	±24	±21	85	±47
12DC-XXS03NP(H3)	3.3	303	78	2400
12DC-XXS05NP(H3)	5	200	82	2400
12DC-XXS09NP(H3)	9	112	85	1000
12DC-XXS12NP(H3)	12	84	85	680
12DC-XXS15NP(H3)	15	67	87	330
12DC-XXS24NP(H3)	24	42	85	220
12DC-XXD03NP(H3)	±3.3	±151	78	±1200
12DC-XXD05NP(H3)	±5	±100	82	±1200
12DC-XXD09NP(H3)	±9	±56	85	±680
12DC-XXD12NP(H3)	±12	±42	85	±330
12DC-XXD15NP(H3)	±15	±34	87	±220
12DC-XXD24NP(H3)	±24	±21	85	±100

Note:

1. No suffix is standard isolation (1.5KVDC) e.g, 12DC-05S05NP,
*add suffix "H3" for 3KVDC isolation, *add suffix "H4" for 4KVDC isolation, *add
suffix "H5" for 5.2KVDC isolation, *add suffix "H6" for 6KVDC isolation.

2."YY" is input voltage : 03=3.3Vdc, 05=5Vdc, 09=9Vdc
e.g, 12DC-03S05NP, 12DC-05S12NPH3, 12DC-09S15NP


3. "XX" is input voltage : 12=12Vdc, 15=15Vdc, 24=24Vdc
e.g, 12DC-12S05NP, 12DC-15S12NPH3, 12DC-24S15NP

Volgen

DC-DC Converter
12DC SERIES


1Watt

1.5~6KV Isolated
Single & Dual Output
SIP7

CB
Scheme

CE

cUL US

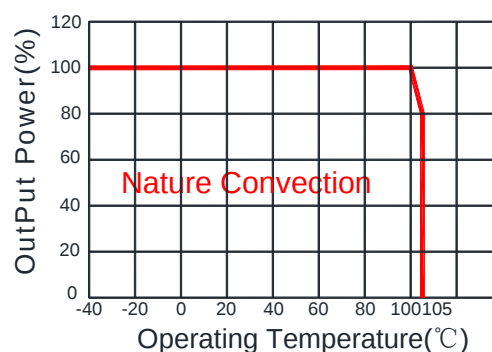ROHS
COMPLIANT3 YEARS
WARRANTY**Temperature Derating Graph****CONTACT US**

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen

Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Range	Vo,Io Nom @Vin:3.3V,5V,9V		±10		%
	Vo,Io Nom@ Vin:12V,15V,24V		±20		%
Filter	Capacitor				

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Continuous				
Line Regulation	For 1.0% OF Vin		1.2		%
Load Regulation	3.3V (10% To 100% F.L)		15	20	%
	5V (10% To 100% F.L)		10	15	%
	9V (10% To 100% F.L)		8	10	%
	12V (10% To 100% F.L)		7	10	%
	15V (10% To 100% F.L)		6	10	%
	24V (10% To 100% F.L)		5	10	%
Ripple & Noise	BW=DC To 20MHz @Vo:3.3V,5V,9V,12V,15V		30	75	mVp-p
	BW=DC To 20MHz @ Vo:24V		50	100	mVp-p

General Specifications


Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Isolation Capacitance	Input-output,100KHz/0.1V		20		pF
Switching Frequency	Full load,nominal input @3.3V, 5V Vin		215/370		KHz
	Full load,nominal input @other Vin		250		KHz
Operation Temperature		-40		+105	°C
Storage Temperature		-55		+125	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight			2.1		g
Dimensions		19.5x6.0x10.0			mm

Part Number

12DC - 15 S 05 N P H3
A B C D E F G

A:Series
B:Input Voltage
C:Single(S)/Dual(D)Output
D:Output Voltage
E:Unregulated(N)
F:Protection
G:Isolation Voltage


Tolerance Envelope Graph

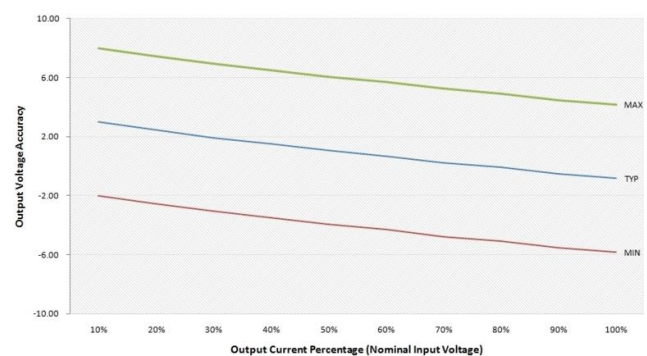

Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)
	RE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)
EMS	ESD	IEC/EN61000-4-2 Air ±8kV , Contact ±6kV perf. Criteria B

Packaging

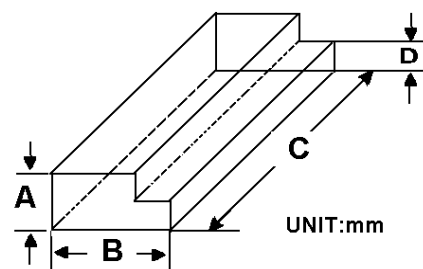

TUBE-----25pcs

Size(mm)			
A	B	C	D
9.5	16.5	522	5.0

CONTACT US



KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN


www.volgen.com
Email: information@volgen.com



Recommended Test Circuit

	<table><thead><tr><th>Vin</th><th>Cin</th><th>Single Vout</th><th>Cout</th><th>Dual Vout</th><th>Cout</th></tr></thead><tbody><tr><td>3.3Vdc</td><td>4.7μF/25V</td><td>3.3Vdc</td><td>10μF/16V</td><td>±3.3Vdc</td><td>±4.7μF/16V</td></tr><tr><td>5Vdc</td><td>4.7μF/25V</td><td>5Vdc</td><td>10μF/16V</td><td>±5Vdc</td><td>±4.7μF/16V</td></tr><tr><td>9Vdc</td><td>4.7μF/25V</td><td>9Vdc</td><td>2.2μF/16V</td><td>±9Vdc</td><td>±1μF/16V</td></tr></tbody></table>	Vin	Cin	Single Vout	Cout	Dual Vout	Cout	3.3Vdc	4.7μF/25V	3.3Vdc	10μF/16V	±3.3Vdc	±4.7μF/16V	5Vdc	4.7μF/25V	5Vdc	10μF/16V	±5Vdc	±4.7μF/16V	9Vdc	4.7μF/25V	9Vdc	2.2μF/16V	±9Vdc	±1μF/16V
Vin	Cin	Single Vout	Cout	Dual Vout	Cout																				
3.3Vdc	4.7μF/25V	3.3Vdc	10μF/16V	±3.3Vdc	±4.7μF/16V																				
5Vdc	4.7μF/25V	5Vdc	10μF/16V	±5Vdc	±4.7μF/16V																				
9Vdc	4.7μF/25V	9Vdc	2.2μF/16V	±9Vdc	±1μF/16V																				
	<table><tbody><tr><td>12Vdc</td><td>2.2μF/25V</td><td>12Vdc</td><td>2.2μF/25V</td><td>±12Vdc</td><td>±1μF/25V</td></tr><tr><td>15Vdc</td><td>2.2μF/25V</td><td>15Vdc</td><td>1μF/25V</td><td>±15Vdc</td><td>±1μF/25V</td></tr><tr><td>24Vdc</td><td>1μF/50V</td><td>24Vdc</td><td>1μF/50V</td><td>±24Vdc</td><td>±1μF/50V</td></tr></tbody></table>	12Vdc	2.2μF/25V	12Vdc	2.2μF/25V	±12Vdc	±1μF/25V	15Vdc	2.2μF/25V	15Vdc	1μF/25V	±15Vdc	±1μF/25V	24Vdc	1μF/50V	24Vdc	1μF/50V	±24Vdc	±1μF/50V						
12Vdc	2.2μF/25V	12Vdc	2.2μF/25V	±12Vdc	±1μF/25V																				
15Vdc	2.2μF/25V	15Vdc	1μF/25V	±15Vdc	±1μF/25V																				
24Vdc	1μF/50V	24Vdc	1μF/50V	±24Vdc	±1μF/50V																				


EMC (CLASS B) compliance circuit

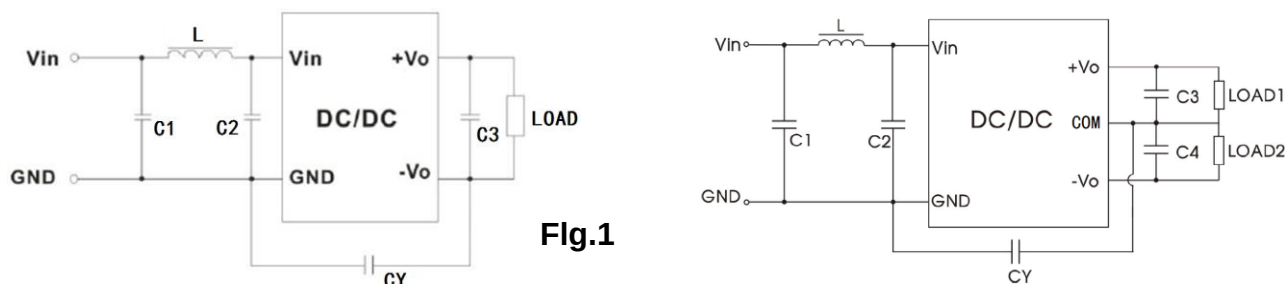

EMC recommended circuit value table

EMI	C1	4.7μF /50V
	C2	4.7μF /50V
	CY	1nF/4kV
	C3,C4	Recommended Test Circuit
	L	6.8μH

Markings and Dimensions

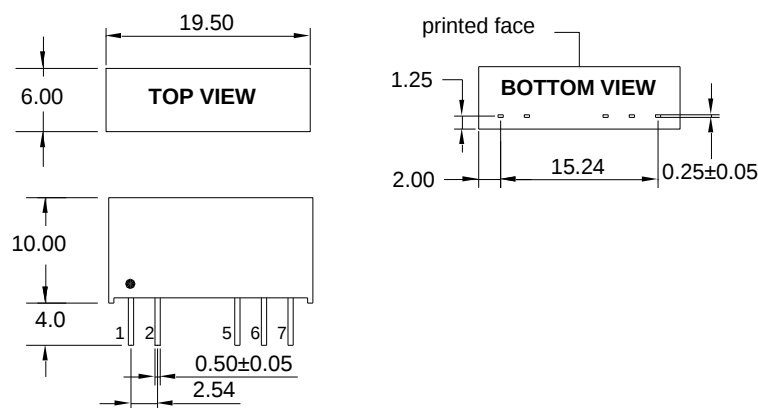

UNIT:mm Unless otherwise specified,all tolerances are ±0.25

PIN Connection

PIN	1	2	5	6	7
Single	+Vin	-Vin	-Vout	No Pin	+Vout
Dual	+Vin	-Vin	-Vout	Com	+Vout

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

