

FEATURES:

- 14PIN SMD Package
- No-load input current as low as 5mA
- Continuous short-circuit protection
- High efficiency up to 87%
- Unregulated output Types
- 1.5KVDC~ 3KVDC isolation
- Operating temperature:-40°C to +105°C
- Industry standard pinout
- UL/cUL/IEC/EN 62368-1 approved, CB-Report

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Voltage	Output Current	Efficiency	Capacitive Load(μF)	Package Style
	Vdc	mA	%TYP	Max.	
13DSC-YY03N*P(H3)	3.3	303	76	2400	1/2/3/4
13DSC-YY05N*P(H3)	5	200	82	2400	1/2/3/4
13DSC-YY09N*P(H3)	9	112	83	1000	1/2/3/4
13DSC-YY12N*P(H3)	12	84	84	470	1/2/3/4
13DSC-YY15N*P(H3)	15	67	84	330	1/2/3/4
13DSC-YY24N3P(H3)	24	42	85	100	3/4
13DSC-XX03N*P(H3)	3.3	303	78	2400	1/2/3/4
13DSC-XX05N*P(H3)	5	200	82	2400	1/2/3/4
13DSC-XX09N*P(H3)	9	112	85	1000	1/2/3/4
13DSC-XX12N*P(H3)	12	84	85	680	1/2/3/4
13DSC-XX15N*P(H3)	15	67	87	330	1/2/3/4
13DSC-XX24N3P(H3)	24	42	85	220	3/4

Note:


- 1.No suffix is standard isolation (1.5KVDC) e.g, 13DSC-15S05NP,
*add suffix "H3" for 3KVDC isolation, e.g, 13DSC-12S09NPH3, 13DSC-12S12NPH3.
2. " * " = 1 or 2 or 3 or 4 for package , no suffix * package1 , When * =2, package2 , and so on, e.g,13DSC-15S05NP,13DSC-24S12N3PH3
When the I / O is equal to 24 V, package 1 and 2 disable.
3. "YY" is input voltage : 03=3.3Vdc,05=05Vdc, 09=9Vdc
e.g, 13DSC-03S05N3P, 13DSC-05S12NPH3, 13DSC-09S15N2P
4. "XX" is input voltage : 12=12Vdc,15=15Vdc, 24=24Vdc
e.g, 13DSC-12S05N3P, 13DSC-15S12NPH3, 13DSC-24S15N3P,13DSC-24S12N4P

Völgen

DC-DC Converter 13DSC SERIES

1Watt

1.5KV ~ 3KV Isolated
Single Output
SMD14

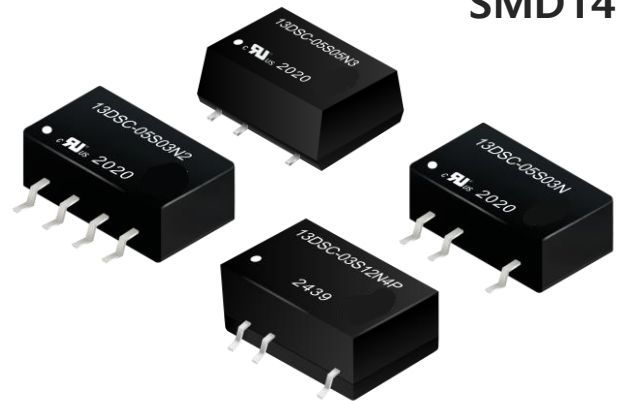


CB
Scheme

cUL[®] US

ROHS
COMPLIANT

3 YEARS
WARRANTY

Temperature Derating Graph

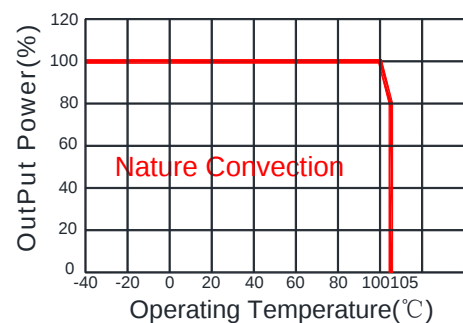

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Völgen



Input Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Range	Vo,Io Nom @Vin:3.3V,5V,9V		±10		%
	Vo,Io Nom@ Vin:12V,15V,24V		±20		%
Filter	Capacitor				
SurgeRange (1 sec. max.)	3.3VDC input	-0.7		5	VDC
	5VDC input	-0.7		9	VDC
	9VDC input	-0.7		15	VDC
	12VDC input	-0.7		18	VDC
	15VDC input	-0.7		21	VDC
	24VDC input	-0.7		30	VDC
Reflected Ripple Current			15		mA

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Voltage Tolerance	100% full load			±5	%
Short Circuit Protection	Continuous,self-recovery				
Line Regulation	For 1.0% of Vin		1.2		%
Load Regulation	3.3V (10% To 100% F.L)		15	20	%
	5V (10% To 100% F.L)		10	15	%
	9V (10% To 100% F.L)		8	10	%
	12V (10% To 100% F.L)		7	10	%
	15V (10% To 100% F.L)		6	10	%
	24V (10% To 100% F.L)		5	10	%
Ripple & Noise	BW=DC To 20MHz @Vo:3.3V,5V,9V,12V,15V		30	75	mVp-p
	BW=DC To 20MHz @ Vo:24V		50	100	mVp-p

General Specifications



Parameters	Conditions	Min	Typ	Max	Units
Isolation Resistance	500Vdc	1000			MΩ
Isolation Capacitance	Input-output, 100KHz/0.1V		20		pF
Switching Frequency	Full load,nominal input @3.3V, 5V Vin		215/370		KHz
	Full load,nominal input @other Vin		250		KHz
Operation Temperature		-40		+105	°C
Storage Temperature		-55		+125	°C
Humidity	Non Condensing			95	%
Cooling	Free air Convection				
Case material	DAP				
MTBF	MIL-HDBK-217F@25°C	3500000			Hours
Weight	Package 1/2/3/4	1.2/1.2/1.28/1.36			g
	Package 1/2	12.7x7.6x6.25			mm
Dimensions	Package 3	12.8x10.8x6.9			mm
	Package 4	13.2x8.5x7.0			mm

Part Number

13DSC - 12 S 05 N 3 P H3
A B C D E F G H

A:Series
B:Input Voltage
C:Single Output
D:Output Voltage
E:Unregulated(N)
F:Packge
G:Protection
H:Isolation Voltage


Tolerance Envelope Graph

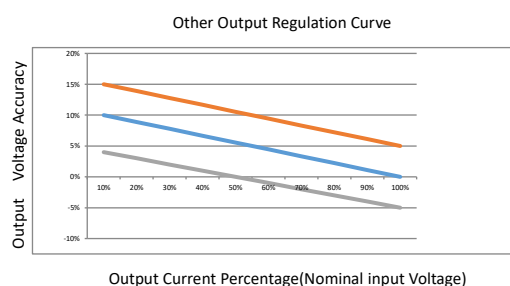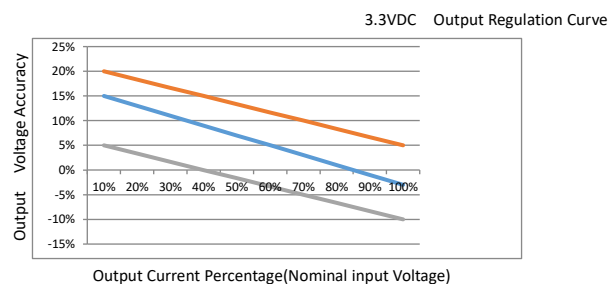

Electromagnetic Compatibility (EMC)

EMI	CE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)
	RE	CISPR32/EN55032 CLASS B (see Fig. 1 for recommended circuit)
EMS	ESD	IEC/EN61000-4-2 Air ±8kV , Contact ±6kV perf. Criteria B

Recommended Test Circuit



Vin	Cin	Single Vout	Cout
3.3Vdc	4.7μF/25V	3.3Vdc	10μF/16V
5Vdc	4.7μF/25V	5Vdc	10μF/16V
9Vdc	4.7μF/25V	9Vdc	2.2μF/16V
12Vdc	2.2μF/25V	12Vdc	2.2μF/25V
15Vdc	2.2μF/25V	15Vdc	1μF/25V
24Vdc	1μF/50V	24Vdc	1μF/50V

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen

EMC (CLASS B) Compliance Circuit


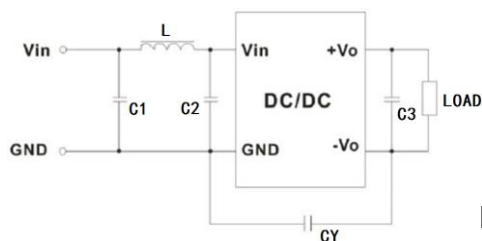


Fig.1

EMC recommended circuit value table

EMI	C1	4.7 μ F /50V
	C2	4.7 μ F /50V
	CY	1nF/4kV
	C3	Recommended Test Circuit
	L	6.8 μ H

Markings and Dimensions

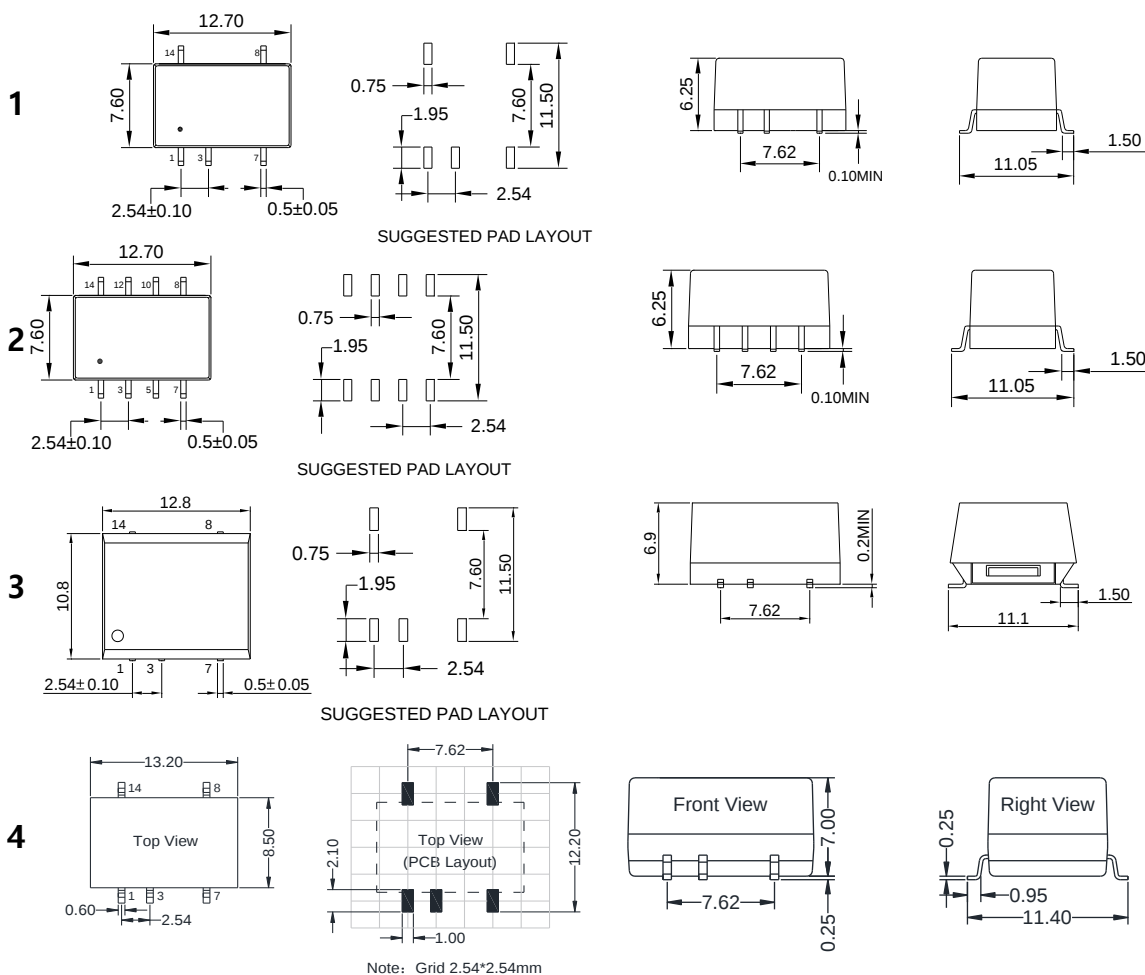

UNIT:mm Unless otherwise specified,all tolerances are ± 0.25

PIN Connection

PIN	1	3	7	8	14	Other
Package 1/3/4	-Vin	+Vin	-Vout	+Vout	NC	NO PIN
Package 2	-Vin	+Vin	-Vout	+Vout	NC	NC

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131



Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen



Packaging

N1 / N2 / N4 Package

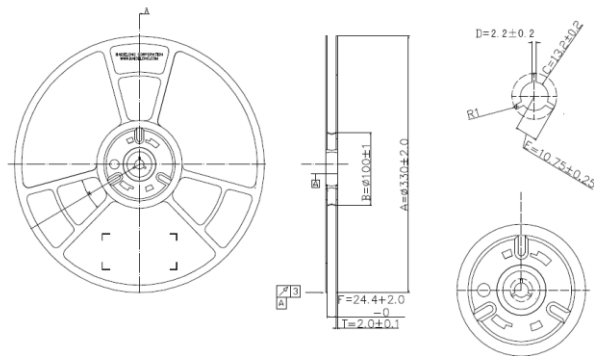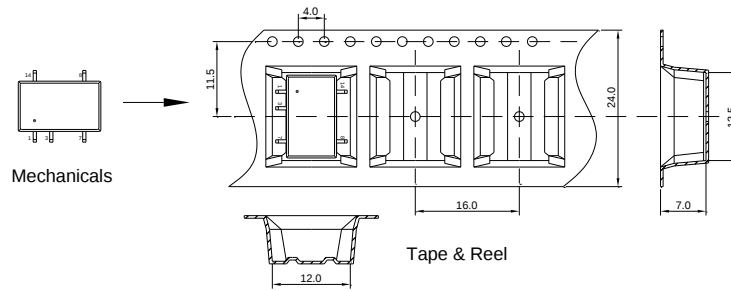

Tape & Reel----- 500 pcs

N3 Package

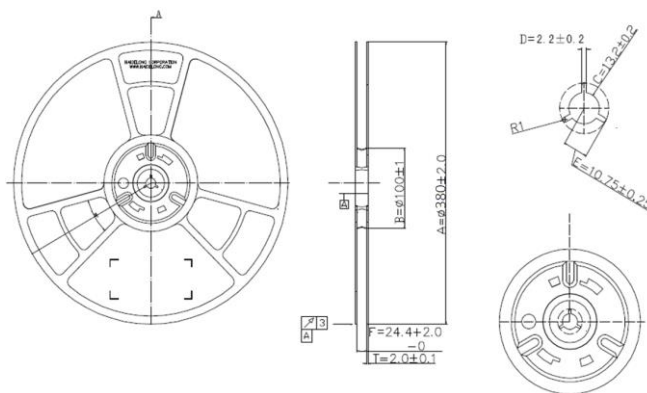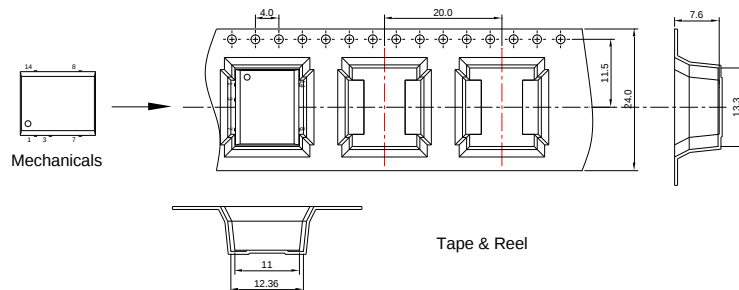

Tape & Reel----- 500 pcs

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131


Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com





Packaging

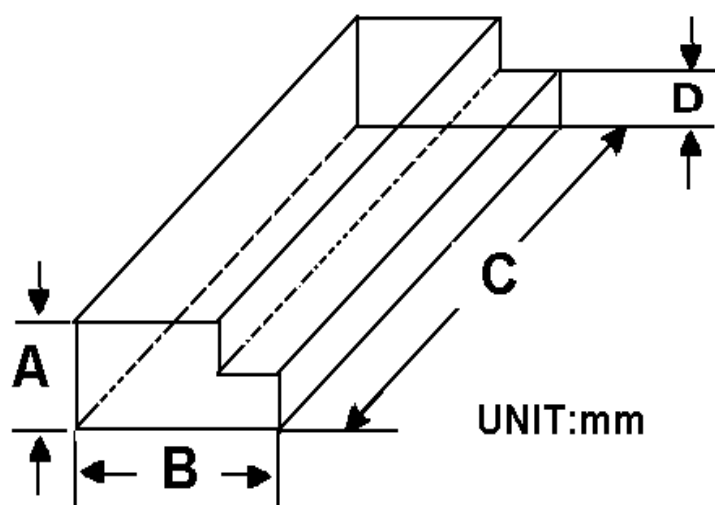

TUBE-----39pcs

Size(mm)			
A	B	C	D
9.50	16.50	522	5.00

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen