


HPA65A/C series

65W Medical / ITE Power Supply

GENERAL DESCRIPTION:

The series provides a voltage range from 8V to 48V, delivering up to 65 watts of power, suitable for various applications and devices.

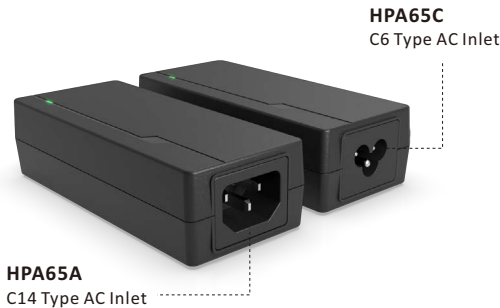

Dimensions (L x W x H): 115 x 50 x 31mm



FEATURES:

- Input Voltage Range 70-264 VAC
- Operating Temperature: -40~70°C
- Suitable for BF Application
- Protection: OVP, OLP, OTP, SCP
- 2 MOPP
- Meet DoE VII
- Designed to Meet ISN, 60335 & 61558
- Extremely Low Leakage Current: < 0.1mA
- Operating Altitude: 5000M
- Built-In EMI Filter
- High Surge Immunity
- IP22
- Pass LPS
- 3-Year Warranty



OPTIONAL FEATURES: [Please Contact Our Sales](#)

- OVC III
- IP54
- Withstand 297 VAC Surge Input for 2 Minutes

APPLICATIONS:

- Medical Devices
- Telecommunication Devices
- Household Devices
- Consumer Electronics
- Office Electronics
- Industrial Equipment

GENERAL SPECIFICATION:

- **Waterproof and Dustproof Degree:** IP22
- **Protection Classes:** Class I
- **Safety:**
IEC 62368-1 Edition 2.0, IEC 62368-1 Edition 3.0, EN 62368-1, UL62368-1, CAN/CSA-C22.2 NO.62368-1-14, IEC 60601-1 Edition 3.2, EN60601-1, ANSI/AAMI ES60601-1: 2005 (R2012), CSA C22.2 NO. 60601-1:14

ELECTRICAL CHARACTERISTICS:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Nominal Input Voltage	100 - 240 VAC	100		240	VAC
Input Voltage Range	Derate Linearly from 100% load at 90 VAC to 70% load at 70 VAC	70		264	VAC
Input Frequency Range	Sine Wave	47		63	Hz
Output Power	See Rating Chart			65	W
Low Line Input Current	Full Load, Vin = 115 VAC			1.5	A
High Line Input Current	Full Load, Vin = 230 VAC			0.75	A
Low Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin = 115 VAC			50	A
High Line Input Inrush Current	Full Load, 25°C, Cool Start, Vin = 230 VAC			100	A
Earth Leakage Current	0.1mA @ 264 VAC Normal Condition, 0.3mA @ 264 VAC Single Fault Condition			0.1	mA
Average Efficiency	CoC v5 (Tier2), See Rating Chart		89		%
Line Regulation	Full Load, Vin = 100 - 120 VAC			0.5	%
Load Regulation	Vin = 100-240 VAC		3	5	%
Hold-Up Time	Hold up time is measured from the end of the last charging pulse to the time which the main output drops down to low limit of main output at rated load and nominal line.		12		ms
Start-Up Time	Full Load: 100-240 VAC. The product is designed to start optimally when powered within 100-240 VAC.			3	s
Rise Time	At 115 VAC & 230 VAC			50	ms
Isolation	Input to Output		4000		VAC
	Input to PE		1500		VAC
	Output to PE [Standard version only (RTN ≠ GND)]		1500		VAC

PROTECTION:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Short Circuit	Hiccup Mode, (Non-Latching, Auto-Recovery)				
Over Temperature	Hiccup Mode, (Non-Latching, Auto-Recovery)				
Overvoltage	Latch Mode	105		150	%
Overload / Overcurrent	Hiccup Mode, (Non-Latching, Auto-Recovery)	110		154	%

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

HPA65A/C series

65W Medical / ITE Power Supply


ENVIRONMENTAL:

Characteristic	Condition	Min.	Typ.	Max.	Unit
Operating Temperature	Derate Linearly From 100% Load at 40°C to 50% Load at 70°C	-40		70	°C
Storage Temperature	Surrounding Air Temperature	-40		85	°C
Temperature Coefficient	All Condition			±0.04	%/°C
Operating Humidity	10-95% RH (Non-Condensing)	10		95%	RH
Storage Humidity		0		95%	RH
Operating Altitude	Up to 5,000 meters	5000			m
Vibration	Non-Operating, 5-500 Hz, 2.09 Grms, 20 minute for Each Three Axis			2.09	G

RATING CHART:

MODEL NO.	Rated Output Voltage	Rated Output Current	Maximum Output Power	Ripple & Noise	Total Regulation	10% Load Efficiency	AVG. Efficiency	Max.No Load Consumption	Hold-Up Time (typ.)	Limited Power Source
	(VDC)	(A)	(W)	(mVp-p)	(%)	(%)	(%)	(W)	(ms)	(LPS)
HPA65□-080	8	6.75	54	100	±5	84.0	89.0	0.15	12	×
HPA65□-090	9	6.00	54	100	±5	84.0	89.0	0.15	12	×
HPA65□-120	12	5.42	65	100	±3	84.0	89.0	0.15	12	✓
HPA65□-150	15	4.33	65	100	±3	84.0	89.0	0.15	12	✓
HPA65□-160	16	4.06	65	120	±3	84.0	89.0	0.15	12	✓
HPA65□-180	18	3.61	65	120	±3	84.0	89.0	0.15	12	✓
HPA65□-190	19	3.42	65	120	±3	84.0	89.0	0.15	12	✓
HPA65□-200	20	3.25	65	130	±3	84.0	89.0	0.15	12	✓
HPA65□-240	24	2.70	65	150	±2.5	84.0	89.0	0.15	12	✓
HPA65□-280	28	2.32	65	180	±2.5	84.0	89.0	0.15	12	✓
HPA65□-300	30	2.16	65	200	±2.5	84.0	89.0	0.15	12	✓
HPA65□-480	48	1.36	65	200	±2.5	84.0	89.0	0.15	12	✓

PRODUCT CODING:

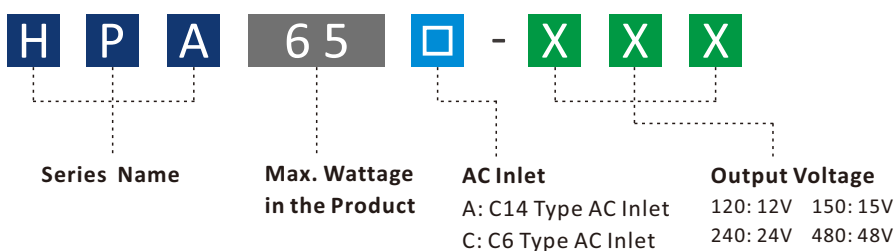

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN



www.volgen.com
Email: information@volgen.com



HPA65A/C series


65W Medical / ITE Power Supply

STATIC CHARACTERISTICS & POWER DE-RATING CURVE:

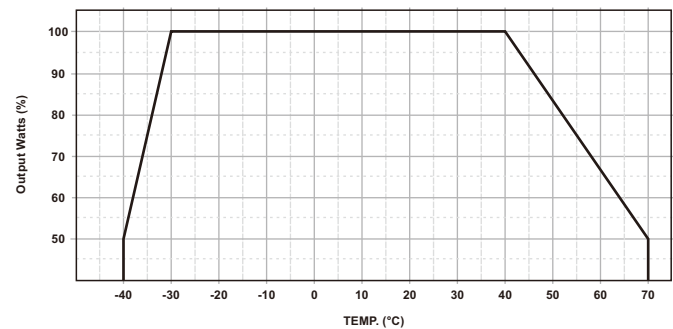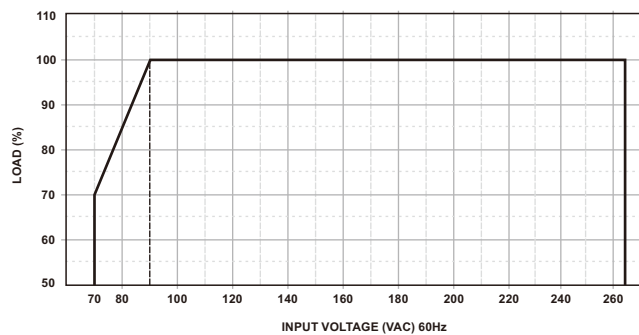


EFFICIENCY VERSUS OUTPUT LOAD :


■ HPA65A-080

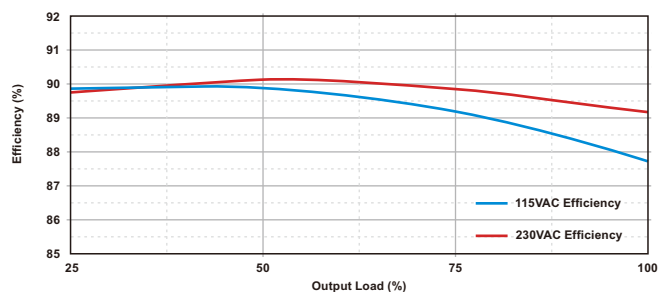


■ HPA65A-090

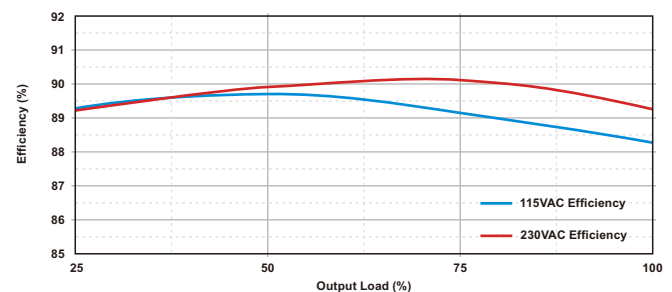


■ HPA65A-120

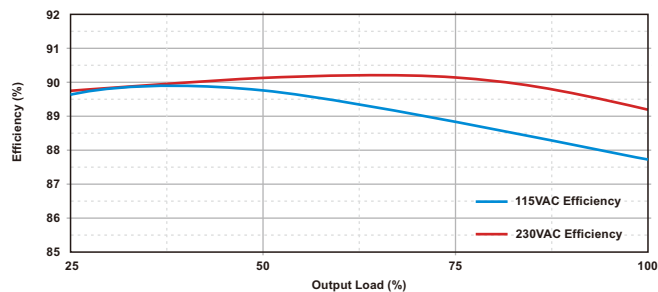

■ HPA65A-240

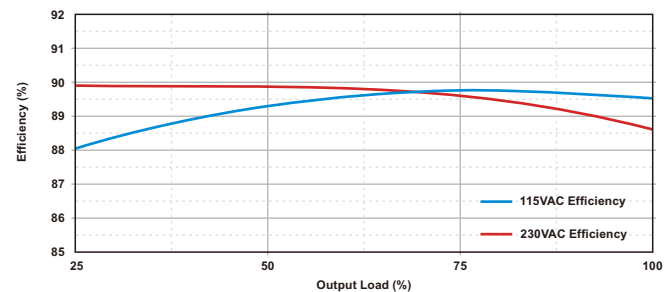

■ HPA65A-480

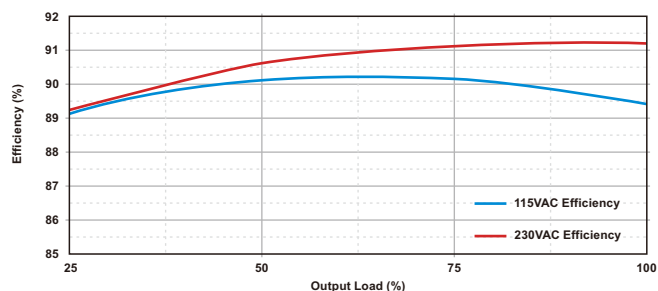

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com





HPA65A/C series



65W Medical / ITE Power Supply

MECHANICAL DIMENSIONS: (UNIT: mm)

HPA65A

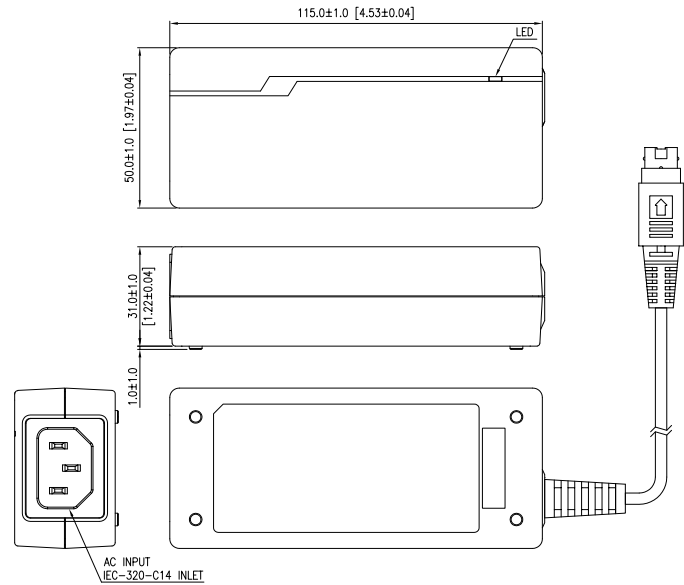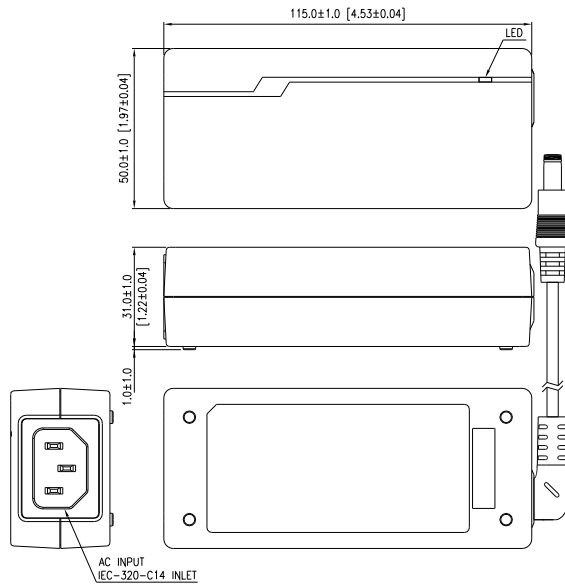

HPA65C

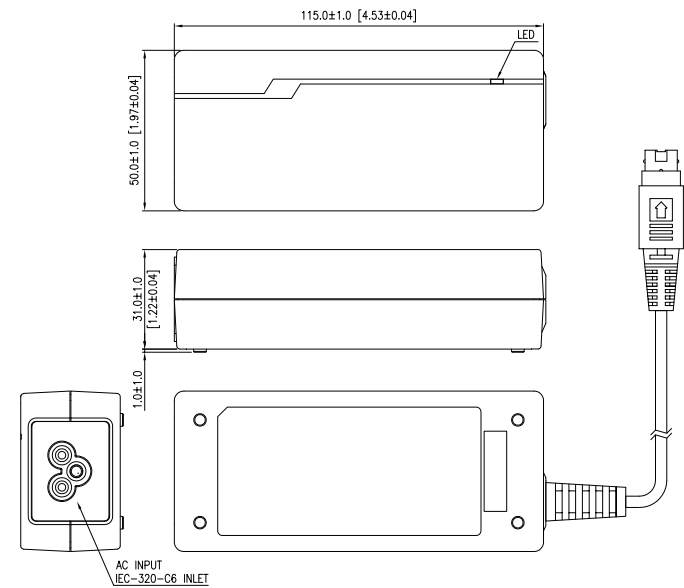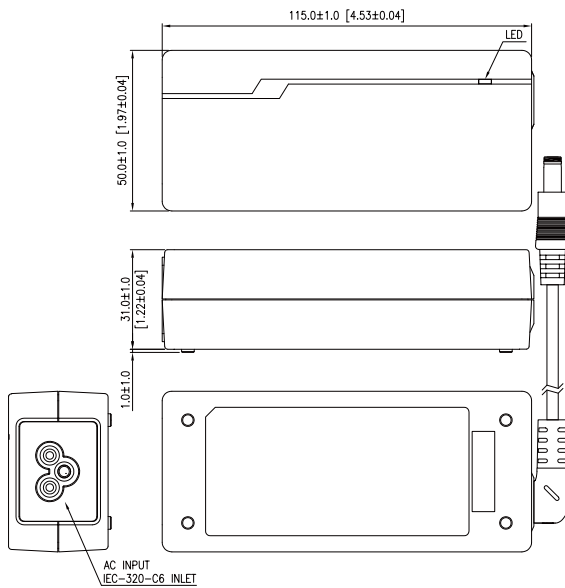

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com



HPA65A/C series

65W Medical / ITE Power Supply

EMC EMISSION:

MEDICAL / ITE	Parameter	Standard	Test Level
MEDICAL	Conducted	EN55011	Class B
	Radiated	EN55011	Class B
	Harmonics	EN61000-3-2	-
	Flicker	EN61000-3-3	-
ITE	Conducted	EN55032	Class B
	Radiated	EN55032	Class B
	Harmonics	EN61000-3-2	N/A
	Flicker	EN61000-3-3	-

* The EMC test requires the integration of the switching power supply with the load of an end system.
Consequently, variations in the application or assembly of the end system will influence the test results.

EMC IMMUNITY:

MEDICAL / ITE	Parameter	Standard	Test Level	Criteria
MEDICAL	ESD	EN61000-4-2	15kV air discharge, 8kV discharge coupling plane	A
	RS	EN61000-4-3	-	A
	EFT	EN61000-4-4	2kV	A
	Surge	EN61000-4-5	line to line ± 2 kV, line to ground ± 4 kV	A
	CS	EN61000-4-6	0.15-80 (MHZ)	A
	PFMF	EN61000-4-8	-	A
	Voltage Dips (230V & 100V)	EN61000-4-11	0% Ut, 0.5 cycle (10ms) @ full load 0°/45°/90°/135°/180°/225°/270°/315°/360°	A
			0% Ut, 1 cycle (20ms), 0° @ full load	B
			70% Ut, 25 cycle (500ms), 0° @ full load	A
	Voltage Interruptions (230V & 100V)	EN61000-4-11	0% Ut, 250 cycle (5s) @ full load 0°/45°/90°/135°/180°/225°/270°/315°/360°	B
ITE	Radiated Fields In Close Proximity	EN61000-4-39	-	A
	ESD	EN61000-4-2	8kV air discharge, 4kV contact discharge	A
	RS	EN61000-4-3	80 – 1000(MHZ) 1800, 2600, 3500, 5000 (MHZ) ($\pm 1\%$)	A
	EFT	EN61000-4-4	2kV	A
	Surge	EN61000-4-5	line to line ± 2 kV, line to ground ± 4 kV	A
	CS	EN61000-4-6	0.15-80(MHZ)	A
	PFMF	EN61000-4-8	-	A
	Voltage Dips (230V & 100V)	EN61000-4-11	0% Ut, 0.5 cycle (10ms) @ full load 0°/45°/90°/135°/180°/225°/270°/315°/360°	A
			0% Ut, 1 cycle (20ms), 0° @ full load	B
			70% Ut, 25 cycle (500ms), 0° @ full load	A
	Voltage Interruptions (230V & 100V)	EN61000-4-11	0% Ut, 250 cycle (5s) @ full load 0°/45°/90°/135°/180°/225°/270°/315°/360°	B

* The EMC test requires the integration of the switching power supply with the load of an end system.
Consequently, variations in the application or assembly of the end system will influence the test results.

OTHERS:

MEDICAL / ITE	Condition	Min.	Typ.	Max.	Unit
MTBF(typ.)	1 million hours based on Telcord ia SR-332(at 115 Vac, MAX. load and 25°C ambient)		1000k		h
Net Weight	HPA65A-120 with a 16AWG, 4ft standard cable		225		g

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com






HPA65A/C series

65W Medical / ITE Power Supply






OUTPUT CABLE RECOMMENDATION :

1. Selected output connectors and wire, please refer to the Appendix.
2. 8V-9V are required to use AWG#14, 2FT, UL11353, 80°C output cable.
3. 12V are required to use AWG#16, 4FT, UL1571, 80°C output cable.
4. 15V-16V are required to use AWG#16, 4FT, UL1571, 80°C output cable.
5. 18V-24V are required to use AWG#18, 4FT, UL1571, 80°C output cable.
6. 28V-48V are required to use AWG#20, 4FT, UL1185, 80°C output cable.

STANDARD CONNECTOR:

Barrel Female Plug	Plug PN	OD	ID	L	Standard Connection	Wire Material	Wire Type
	P01N	5.5	2.5	11	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL1571	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT
						UL1185	28V-48V: 20 AWG/4 FT
	P01K	5.5	2.1	11	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL1571	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT
						UL1185	28V-48V: 20 AWG/4 FT
POWER DIN-4 + Lock	Plug PN	Standard Connection				Wire Material	Wire Type
	P09B	P1,P2=OUT P3,P4=RTN				UL11353	8V-9V: 14 AWG*2C/2FT

OPTINONAL CONNECTOR:

Barrel Female Plug	Plug PN	OD	ID	L	Standard Connection	Wire Material	Wire Type
	P01M	5.5	2.5	9.5	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL1571	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT
						UL1185	28V-48V: 20 AWG/4 FT
	P01S	5.5	2.5	12	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL1571	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT
						UL1185	28V-48V: 20 AWG/4 FT
Barrel Angle Female Plug	Plug PN	OD	ID	L	Standard Connection	Wire Material	Wire Type
	P02M	5.5	2.5	9.5	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL1571	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT
						UL1185	28V-48V: 20 AWG/4 FT
	P02N	5.5	2.5	11	Center=OUT(+) Sleeve=RTN(-) (Tuning Fork Type)	UL1571	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT
						UL1185	28V-48V: 20 AWG/4 FT
DIN-5 Male Plug	Plug PN	Standard Connection				Wire Material	Wire Type
	P05B	P1,P2,P4=RTN P3,P5=OUT SHIELD=GND				UL2464	12V, 15V-16V: 16 AWG/4 FT 18V-24V: 18 AWG/4 FT 28V-48V: 20 AWG/4 FT

* Please contact our sales team for detailed information regarding optional output connectors.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

