

Industrial Power Supply

A-150FGD Series

Product Features

- AC input range selectable by switch
- High efficiency, long life and high reliability
- Output protections: SCP/OVP/OLP
- Operating temperature: -30°C~+70°C
- LED indicator for power on
- 100% full load burn-in test
- Low profile, 30mm
- Cooling by free air convection
- 3 years warranty



RoHS

Product Description

A-150FGD-X series is a 150W single-output industrial power supply. With AC/DC input voltage selectable by switch and output voltages of 5V/12V/15V/24V/36V/48V, it can adapt to diverse load requirements and meet the needs of most industrial applications. Furthermore, the product meets international EMC and safety standards, including IEC/EN/UL62368 and GB4943. High conversion efficiency, a compact housing design, excellent heat dissipation, and comprehensive protection ensure the high reliability and stability.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com




Applications

Industrial control system, Mechanical and electrical equipment, Electronic instruments and equipment, Industrial automation machinery, Semiconductor device, etc.

Model Encoding

A-150 FGD-X YY

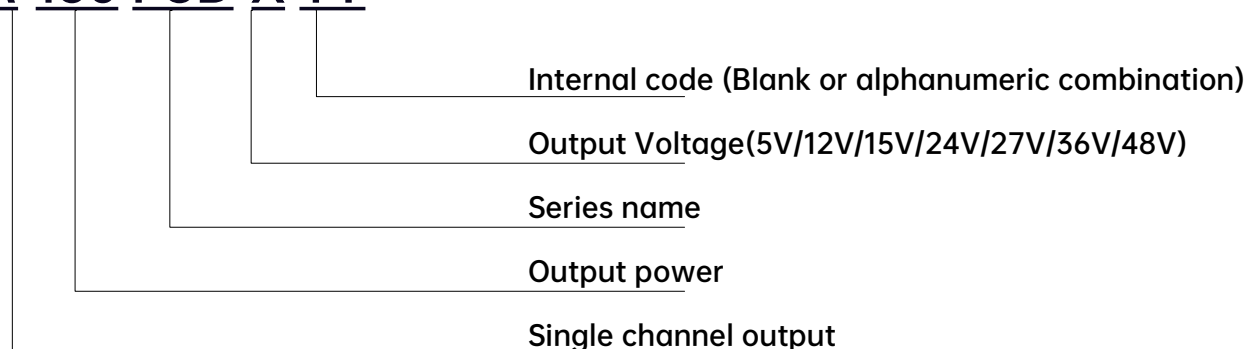

© Model List:

Model	Output Power (W)	Output Voltage (V _{dc})	Adjustable output voltage ^[3] (V _{dc})	Output Current (A)	Ripple and noise (mV) ^[2]	Efficiency @230VAC (Typ.) ^[1]	Maximum capacitive load(μF)
A-150FGD-5	150	5	4.5-5.5	0-30	150	85%	8000
A-150FGD-12	150	12	10.8-13.2	0-12.5	150	86%	6000
A-150FGD-15※	150	15	13.5-16.5	0-10	150	86%	3600
A-150FGD-24	150	24	21.6-26.4	0-6.25	150	86%	1500
A-150FGD-27※	148.5	27	24.3-29.7	0-5.5	150	86%	900
A-150FGD-36	147.6	36	32.4-39.6	0-4.1	250	87%	720
A-150FGD-48	148.8	48	43.2-52.8	0-3.1	300	87%	360

Note: [1] All parameters not specially mentioned are measured at rated input voltage, full load and 25°C ambient temperature.

[2] Ripple & noise are measured at 20MHz of oscilloscope bandwidth(oscilloscope probe cap and ground clamp are removed)by using a 20±2cm twisted pair-wire terminated with a 47μF electrolytic capacitor and a 0.1μF high frequency capacitor that are connected in parallel at the output end.

[3] Under any steady operating condition, the total output power shall not exceed the rated output power. When the output voltage is raised, the total output power cannot exceed the rated output power. When the output voltage is turned down, the output current cannot exceed the rated output current.

※ For the product models under development, please contact our sales team or distributor for more information.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com



© Input Specification:

Parameter	Min.	Typ.	Max.	Notes
Input AC Voltage	90V _{ac}		132 V _{ac}	Selectable by switch
	176V _{ac}		264V _{ac}	
Rated Input AC Voltage	100V _{ac}		120 V _{ac}	
	200V _{ac}		240V _{ac}	
Input DC Voltage	127V _{dc}		186 V _{dc}	
	248V _{dc}		373 V _{dc}	
Input Frequency	47Hz		63 Hz	
Max. Input Current			3.6A	115Vac, full load
			1.8A	230Vac, full load
Leakage Current			3.5mA	240Vac/50Hz
Inrush Current		30A		115Vac, cold start
		60A		230Vac, cold start

© Output Specifications:

Parameter	Min.	Typ.	Max.	Notes
Output Voltage Tolerance	-2%		+2%	A-150FGD-5 A-150FGD-12
	-1.5%		+1.5%	Other models
Line Regulation	-0.5%		+0.5%	All models
Load Regulation	-0.5%		+0.5%	All models
Setup Time			2500ms	115Vac/230Vac, full load
Rise Time			200ms	115Vac/230Vac, full load
Hold up Time	20ms			115Vac/230Vac, full load

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

© Efficiency:

Parameter	Min.	Typ.	Max.	Notes
Efficiency@115 V_{ac}				
A-150FGD-5	83%	84%		Ambient temp. 25±5°C, full load
A-150FGD-12	84%	85%		
A-150FGD-15	84%	85%		
A-150FGD-24	84%	85%		
A-150FGD-27	84%	85%		
A-150FGD-36	85%	86%		
A-150FGD-48	85%	86%		
Efficiency@230 V_{ac}				
A-150FGD-5	84%	85%		Ambient temp. 25±5°C, full load
A-150FGD-12	85%	86%		
A-150FGD-15	85%	86%		
A-150FGD-24	85%	86%		
A-150FGD-27	85%	86%		
A-150FGD-36	86%	87%		
A-150FGD-48	86%	87%		

© Protection:

Parameter	Min.	Typ.	Max.	Notes
Over Load	110%		160%	Hiccup mode, auto recovery after fault condition is removed.
Over Voltage	110%		140%	Constant voltage, auto recovery after fault condition is removed.
Short Circuit	Hiccup mode, auto recovery after fault condition is removed.			

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com



© Safety & EMC:

Safety Category	Country/Territory	Item	Standards
UL/CUL	USA/Canada	Safety Standard	UL 62368-1
			CAN/CSA C22.2 No. 62368-1:19
CE	Europe		EN 62368-1
CB	CB Countries		IEC 62368-1
CCC	China		GB 4943.1

EMI Category	Country/Territory	Item	Standards/Criteria	
FCC	USA/Canada	Conducted Emission	FCC part 15(ANSI C63.4)	Class B
		Radiated Emission	FCC part 15(ANSI C63.4)	Class B
CE	Europe	Conducted Emission	EN 55032	Class B
		Radiated Emission	EN 55032	Class B
		Harmonic Current	EN 61000-3-2	Class A
		Voltage Flicker	EN 61000-3-3	
CCC	China	Conducted Emission	GB/T 9254.1	Class B
		Radiated Emission	GB/T 9254.1	Class B
		Harmonic Current	GB/T 17625.1	Class A

EMS Category	Country/Territory	Item	Standards/Criteria		
CE	Europe	Electro-static Discharge	EN 61000-4-2	Air 8 kV / Contact 4 kV	Criteria B
		Radiated Susceptibility	EN 61000-4-3	80MHz-1GHz 10V/m	Criteria B
		Electrical Fast Transient	EN 61000-4-4	±2KV	Criteria B
		Surge Immunity	EN 61000-4-5	CM±2KV/DM ±1KV	Criteria B
		Conducted Emission Immunity	EN 61000-4-6	10Vr.m.s	Criteria B
		Power Frequency Magnetic Field Immunity	EN 61000-4-8	30A/m, continuous	Criteria A
		Voltage Dips, Drops and Interruptions Immunity	EN 61000-4-11	Drop 100%, 0.5 cycle	Criteria B
				Drop 20%,250 cycles	Criteria B
				Drop 30%,25 cycles	Criteria B
				Interrupt 100%, 250 cycles	Criteria C

Note:

The power supply is considered as a component which will be installed into a final equipment. All the EMC tests are be executed by mounting the unit on a metal plate with size 400mm*400mm*3mm. The final equipment must be re-confirmed that it still meets EMC directives.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

© General Specifications:

Parameter		Min.	Typ.	Max.	Notes
Dielectric Strength ^[4]	Input-Output	3000 V _{ac}			Test time 1 minute leakage current < 5mA
	Input-PE	1800 V _{ac}			
	Output-PE	500 V _{ac}			
Insulation Resistance	Input-Output	100MΩ			Test Voltage: 500V _{dc}
	Input-PE	100MΩ			
	Output-PE	100MΩ			
Working Temp.		-30°C		+70°C	Refer to "Derating Curve"
Working Humidity		20%RH		95%RH	Non-condensing
Storage Temp.		-40°C		+85°C	
Storage Humidity		10%RH		95%RH	Non-condensing
Temp. Coefficient		-0.03%/°C		0.03%/°C	0~50°C
MTBF		250000 hours			25°C, MIL-HDBK-217F
Dimension		159*97*30mm			L*W*H
Net Weight			380g		
Packing		40PCS/17.5Kg/CTN, Carton Dimension: 390(L)*352(W)*228(H)mm			

Note: [4] The minium withstand voltage is 3000Vac, if a higher test standard is needed, please contact our sales representative or FAE.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131


Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com




© Derating Curve:

Input voltage VS Output power

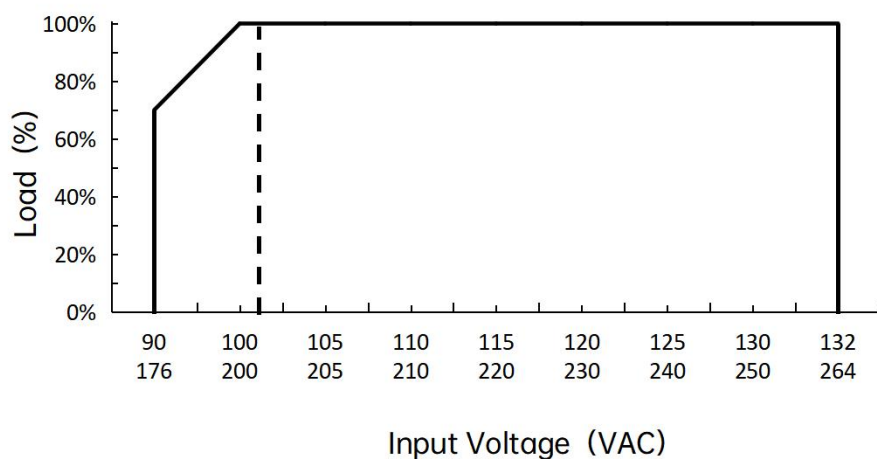

Ambient temperature VS Output power

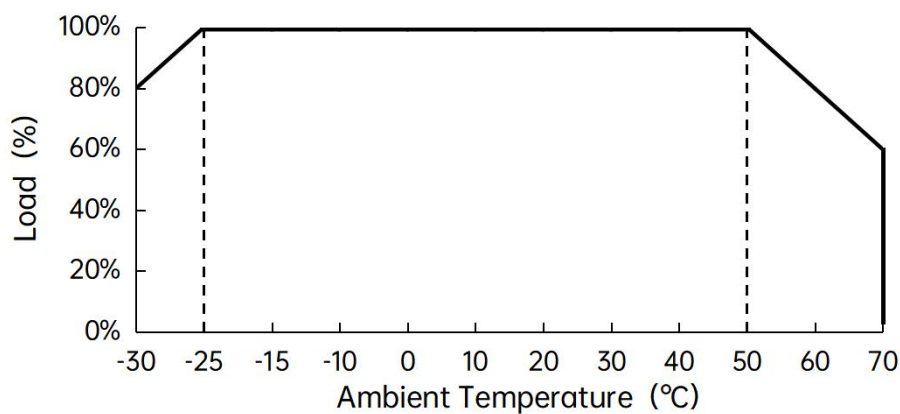

Note:

1. If you need to know more detailed test data, please contact our technical support.
2. This product is suitable for use in natural air convection environments. If used in a closed environment, please contact our technical support.


CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

© Mechanical Drawing:

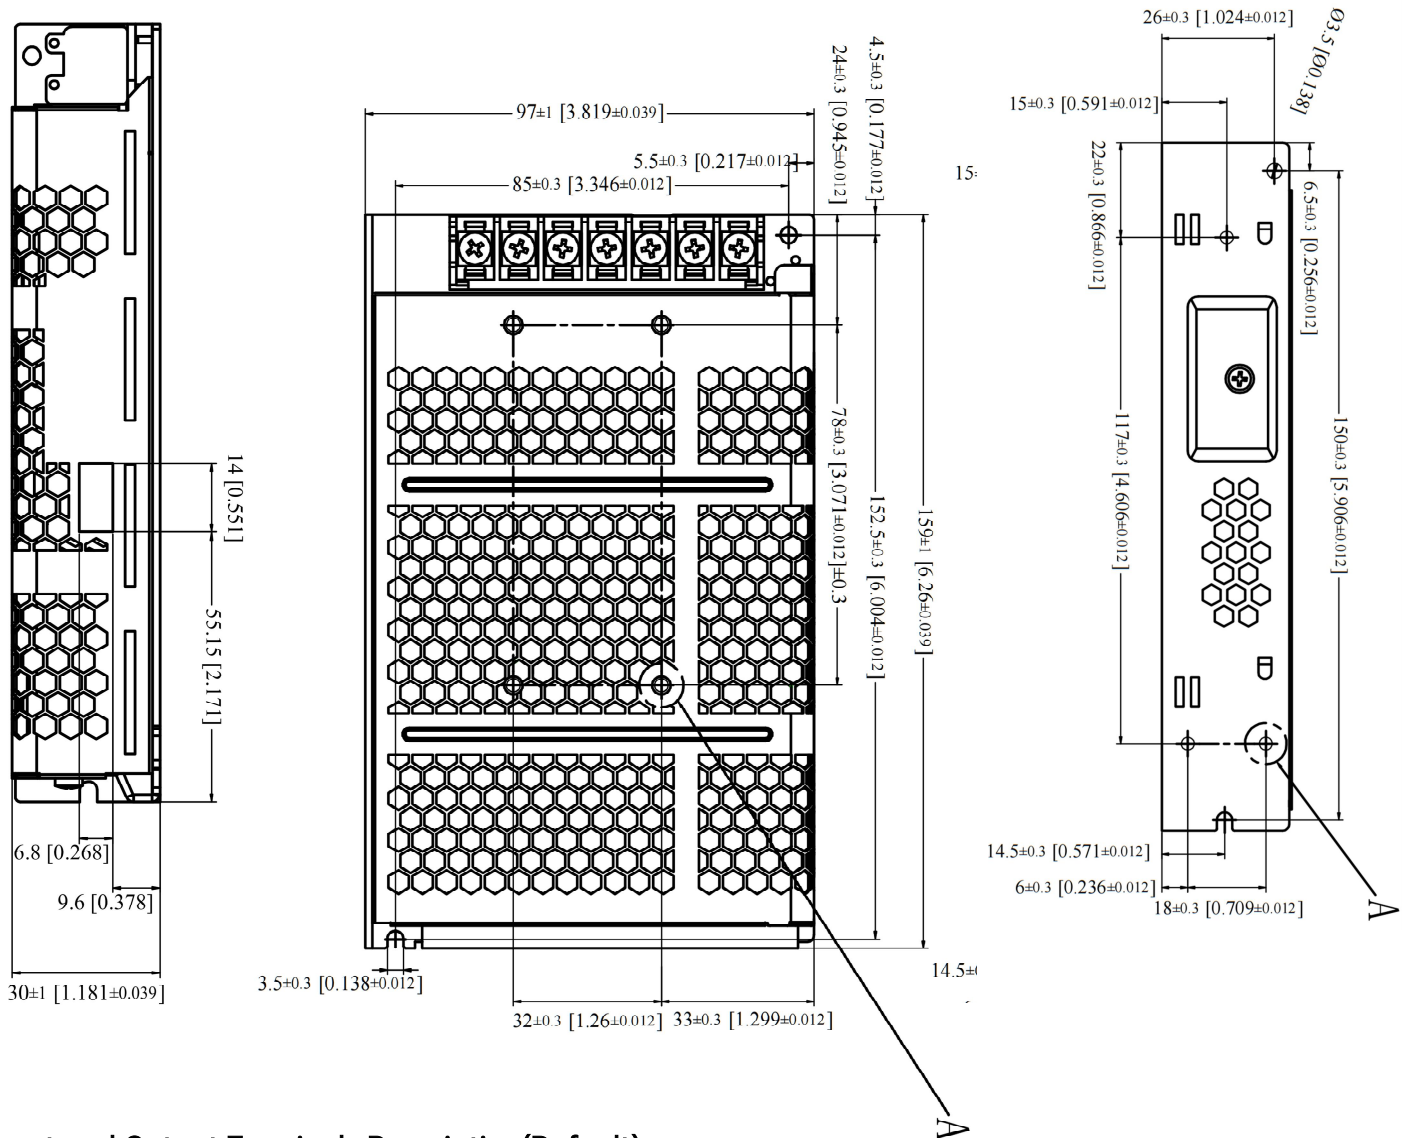

Input and Output Terminals Description(Default)

Pin	Function	Screw spec. & Torque(max)
L	AC/L	Screw: M4*7 Torque: 12Kgf.cn(1.2N.m)
N	AC/N	
⊕	EARTH	
V-	DC output -	Screw: M4*7 Torque: 12Kgf.cn(1.2N.m)
V-	DC output -	
V+	DC output +	
V+	DC output +	

Note:
 7-M3 mounting holes
 Mounting Instruction:
 Screw: M3
 Installation torque: 4Kgf.cn(0.4N.m)
 Penetration Depth L (max): 3mm
 Unit: mm[inch];
 The unmarked tolerance is $\pm 0.5[\pm 0.020]$

CONTACT US

KAGA FEI America, Inc.
 2349 Bering Drive
 San Jose, CA 95131

Phone: (408) 570-0955
 Fax: (408) 570-0186
 Toll Free: (888) 2 - VOLGEN

www.volgen.com
 Email: information@volgen.com