

Industrial Power Supply

CHA-750 PFC Fanless SERIES

Product features

- Universal Input: 90-264Vac / 120-370Vdc
- Built-in active PFC, PF>0.95
- High efficiency up to 95%
- 4000V withstand voltage
- Support remote sense, ON/OFF control, DC OK signal(Optional)
- Output protections: SCP/OVP/OCP/OTP
- Operating temperature: -30°C to +70°C
- Semi-potted, fanless design
- Slim and low profile(41mm)
- 3 years warranty



Product Description

CHA-750-XP series is a 750W single-output slim type industrial power supply. With input voltage range of 90-264VAC/120-370VDC and output voltages of 12V/24V/36V/48V/55V, it can adapt to diverse load requirements and meet the needs of most industrial applications. Furthermore, the product meets international EMC and safety standards, including IEC/EN/UL62368 and GB4943. High conversion efficiency, a compact housing design, excellent heat dissipation, and comprehensive protection ensure the high reliability and stability of this series.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131


Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Applications

Industrial control system, mechanical and electrical equipment, electronic instruments, industrial automation, etc.

Model Encoding

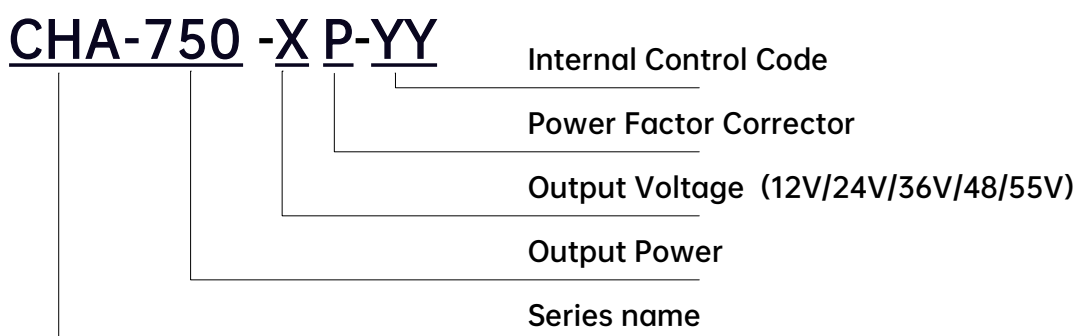

© Model List:

Model	Output power (W)	Output voltage (V _{dc})	Adjustable output voltage[3] (V _{dc})	Output current (A)	Ripple and noise (mV) ^[2]	Efficiency @230VAC (Typ.) ^[1]	Maximum capacitive load (uF)
CHA-750-12P	720	12	12-12.6	0-60	200	93%	8000
CHA-750-24P	751.2	24	24-28.8	0-31.3	250	93.5%	5000
CHA-750-36P*	752.4	36	36-43.2	0-20.9	250	94%	3000
CHA-750-48P	753.6	48	44-52.8	0-15.7	250	95%	2000
CHA-750-55P*	759	55	53-58	0-13.8	250	95%	1000

Note: [1] All Parameters not specially mentioned are measured at rated input voltage, full load and 25°C ambient temperature.

[2] Ripple & noise are measured at 20MHz of oscilloscope bandwidth (oscilloscope probe cap and ground clamp are removed) by using a 20±2cm twisted pair-wire terminated with a 47uF electrolytic capacitor and a 0.1uF high frequency capacitor that are connected in parallel at the output end.

[3] Under any steady operating condition, the total output power shall not exceed the rated output power. When the output voltage is raised, the total output power cannot exceed the rated output power. When the output voltage is turned down, the output current cannot exceed the rated output current.

※ For the product models under development, please contact our sales team or distributor for more information.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

© Input Specification:

Parameters	Min.	Typ.	Max.	Notes
Input AC Voltage	90 V _{ac}		264 V _{ac}	
Rated Input AC Voltage	100 V _{ac}		240 V _{ac}	
Input DC Voltage	120 V _{dc}		370 V _{dc}	
Input Frequency	47 Hz		63 Hz	
Maximum Input Current			10 A	115Vac, full load
			5 A	230Vac, full load
Power Factor		0.96		115Vac, full load
		0.95		230Vac, full load
Leakage Current			1 mA	240Vac/50Hz
Standby power consumption			2 W	
Inrush Current		30 A		115Vac, cold start
		60 A		230Vac, cold start

© Output Specifications:

Parameters	Min.	Typ.	Max.	Notes
Output Voltage Accuracy	-1.5%		+1.5%	Others
	-2.5%		+2.5%	CHA-750-12P
Line Regulation	-0.5%		+0.5%	All
Load Regulation	-1.0%		+1.0%	Others
	-2.0%		+2.0%	CHA-750-12P
Turn On Delay Time			2000ms	115Vac/230Vac,full load
Rise Time			50ms	115Vac/230Vac,full load
Hold up Time	10ms			115Vac/230Vac,full load

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com



◎ Efficiency:

Parameters	Min.	Typ.	Max.	Notes
Efficiency@115 V _{ac}				
CHA-750-12P	90%	91%		Ambient temp. 25±5°C, full load
CHA-750-24P	90.5%	91.5%		
CHA-750-36P	91%	92%		
CHA-750-48P	92%	93%		
CHA-750-55P	92%	93%		
Efficiency@230 V _{ac}				
CHA-750-12P	92%	93%		Ambient temp. 25±5°C, full load
CHA-750-24P	92.5%	93.5%		
CHA-750-36P	93%	94%		
CHA-750-48P	94%	95%		
CHA-750-55P	94%	95%		

◎ Function Overview:

Parameters	Notes
Cooling method	Fanless design, conduction cooling
Remote sense	S+/S-, the remote sense compensates voltage drop on the load wiring up to 0.2V.
Remote ON/OFF control	RC + / RC - High level (4~10V): OFF; Low level (< 1.2V), open circuit, short circuit: ON;
DC OK signal	When output is normal, DC OK signal is at a low level (<0.5V). When output is lower than 80% of the rated output voltage, DC OK signal voltage equals the external voltage, with a maximum through current of 60mA.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

©Protection:

Parameters	Min.	Typ.	Max.	Notes
Over Load	105%		150%	Hiccup mode, auto recovery after fault condition is removed.
Over Voltage	110%Vo		140%Vo	Hiccup mode, auto recovery after fault condition is removed.
Over temperature (Ambient temperature)		60		Shut down O/P voltage, auto recovery after fault condition is removed.
Short circuit	Hiccup mode, auto recovery after fault condition is removed.			

©Safety & EMC:

Safety Category	Country/Territory	Item	Standards
UL/CUL	USA/Canada	Safety Standard	UL 62368-1
			CAN/CSA C22.2 No. 62368-1:19
CE	Europe		EN 62368-1
CB	CB Countries		IEC 62368-1
CCC	China		GB 4943.1

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

© Safety & EMC:

EMI Category	Country/ Territory	Item	Standards/Criteria	
FCC	USD/ Canada	Conducted Emission	FCC part 15(ANSI C63.4)	Class B
		Radiated Emission	FCC part 15(ANSI C63.4)	Class B
CE	Europe	Conducted Emission	EN 55032	Class B
		Radiated Emission	EN 55032	Class B
		Harmonic current emissions	EN 61000-3-2	Class A
		Voltage Flicker	EN 61000-3-3	
CCC	China	Conducted Emission	GB/T 9254.1	Class B
		Radiated Emission	GB/T 9254.1	Class B
		Harmonic current emissions	GB/T 17625.1	Class A

EMS Category	Country/ Territory	Item	Standards/Criteria		
CE	Europe	Electro-static Discharge	EN 61000-4-2	Air 8 kV / Contact 6 kV	Criteria A
		Radiated Susceptibility	EN 61000-4-3	80MHz-1GHz 10V/m	Criteria B
		Electrical Fast Transient	EN 61000-4-4	±2KV	Criteria B
		Surge Immunity	EN 61000-4-5	CM±4KV/DM ±2KV	Criteria A
		Conducted Emission Immunity	EN 61000-4-6	10Vr.m.s	Criteria B
		Power Frequency Magnetic Field Immunity	EN 61000-4-8	30A/m, continuous	Criteria A
				300A/m, 1 s	
		Voltage Dips, Drops and Interruptions Immunity	EN 61000-4-11	Drop 100%, 0.5 cycle	Criteria B
				Drop 20%, 250 cycle	Criteria B
				Drop 30%, 25 cycle	Criteria B
				Interrupt 100%, 250 cycles	Criteria C

Note:

The power supply is considered as a component which will be installed into a final equipment. All the EMC tests are be executed by mounting the unit on a metal plate with size 400mm*400mm*3mm. The final equipment must be re-confirmed that it still meets EMC directives.

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com



© General Specifications:

Parameters		Min.	Typ.	Max.	Notes
Dielectric Strength ^[4]	Input-Output	4000 V _{ac}			Last for 60s, leakage current < 10mA
	Input-PE	1800 V _{ac}			
	Output-PE	500 V _{ac}			
Insulation Resistance	Input-Output	100MΩ			Test Voltage: 500V _{dc}
	Input-PE	100MΩ			
	Output-PE	100MΩ			
Working Temp.		-30°C		+70°C	Refer to "Derating Curve"
Working Humidity		20%RH		95%RH	Non-condensing
Storage Temp.		-40°C		+85°C	
Storage Humidity		10%RH		95%RH	Non-condensing
Temp. Coefficient		-0.03%/°C		0.03%/°C	0~50°C
MTBF		100000 hours			25°C, MIL-HDBK-217F
Dimension		237*100*41mm			L*W*H
Net Weight			1200g		
Packing		8PCS/11Kg/Carton, Carton size: 375(L)*275(W)*145(H)mm			

Note: [4] The minimum isolated voltage is 4000Vac of this product, if you use a higher testing standard, please contact our sales or FAE

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131


Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com




◎ Performance Curve:

AC input voltage VS. Output power

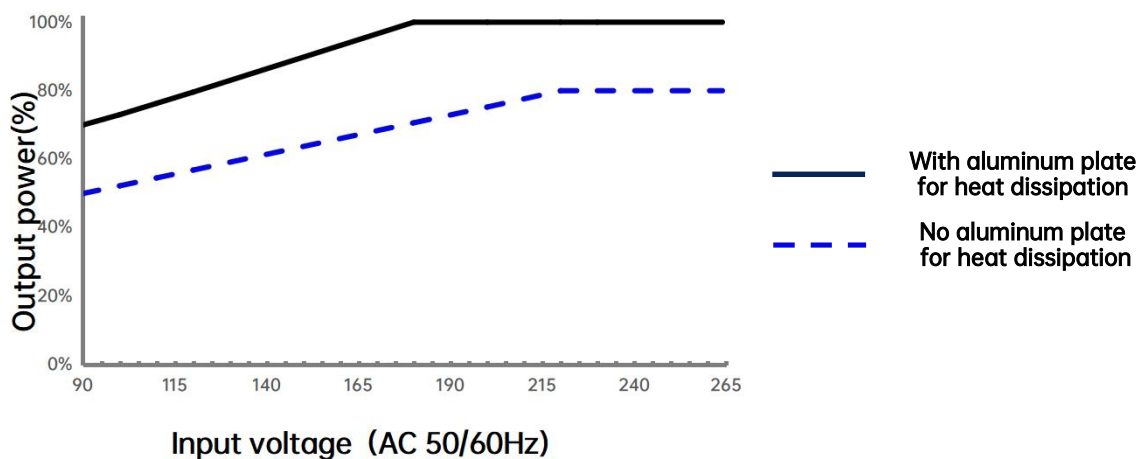

Working ambient temperature VS. Output power

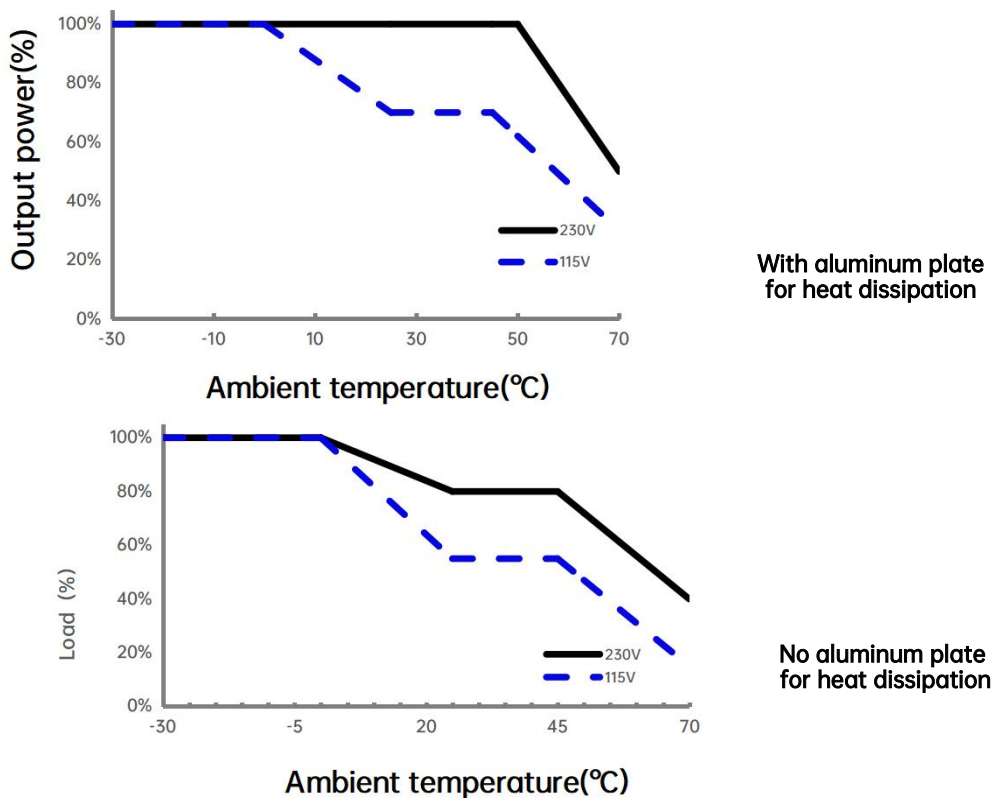

Note:

If more detailed test data during application is needed, please contact our technical team to obtain application notes of related products.

CONTACT US


KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com



© Mechanical Specification:

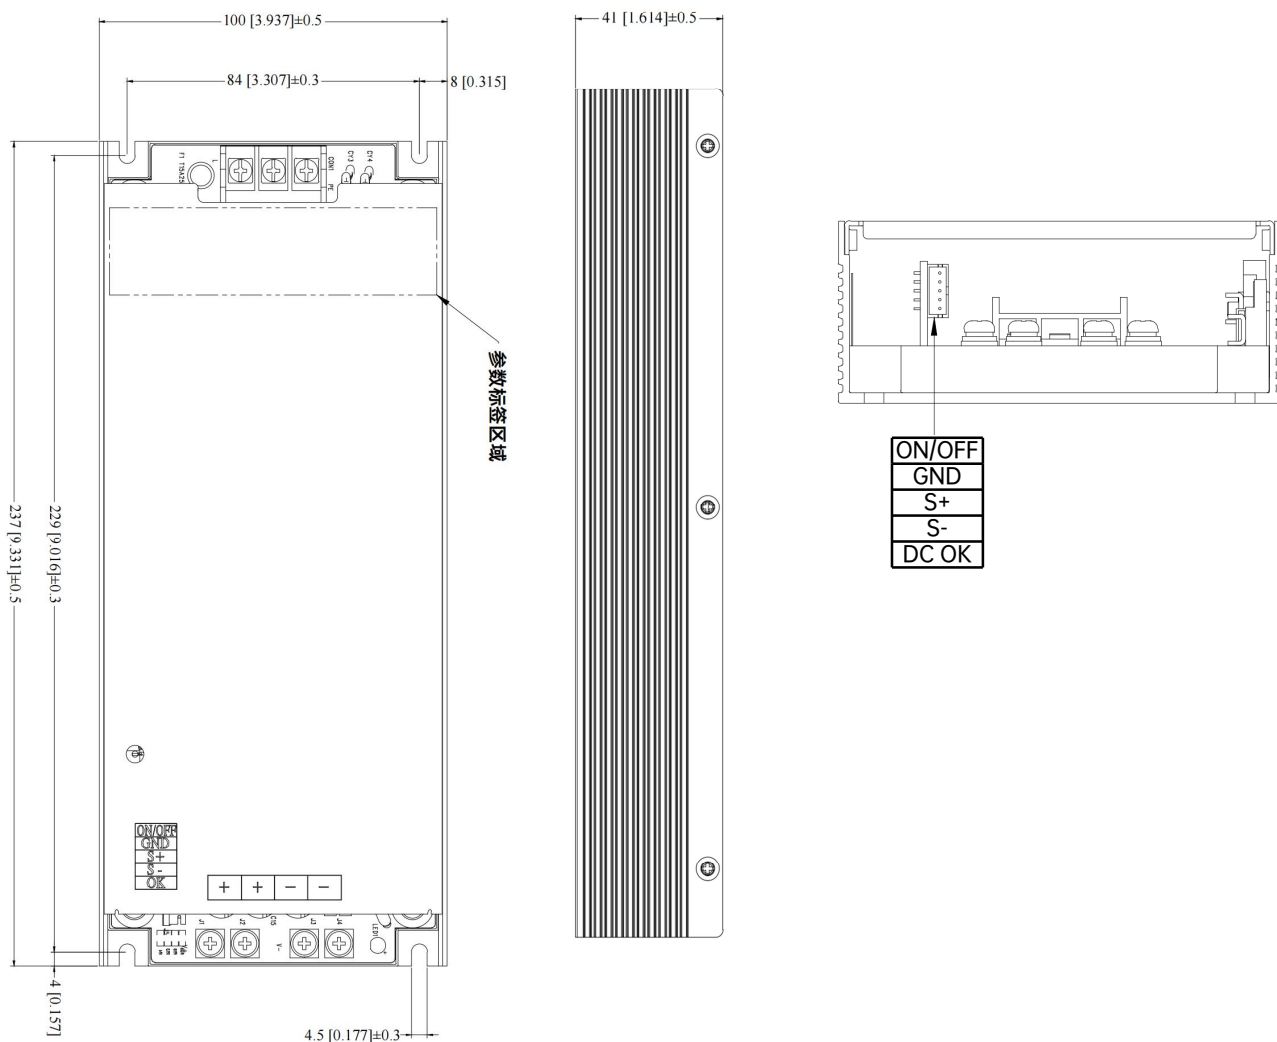

Input and Output Terminals Description

Pin.	Function	Screw spec. & Torque(max)
L	AC/L	Screw: M3×6 Torque: 6Kgf·cn(0.6N·m)
N	AC/N	
⊕	EARTH	
V-	DC output -	Screw: M4×7 Torque: 12Kgf·cn(1.2N·m)
V-	DC output -	
V+	DC output +	
V+	DC output +	
ON/OFF	ON/OFF control	
GND	GND	
S+	Output ON/OFF control signal+	
S-	Output ON/OFF control signal-	
DC OK	DC OK control signal	

Note:

4-M4 Mounting Hole

Mounting Instruction:

Screw:M4

Torque(max):8Kgf.cn(0.8N.m)

Penetration Depth L (max):3mm

Unit:mm

General tolerances :±0.5

CONTACT US


KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

© Installation requirements:

To ensure that this product meets the electrical performance requirements stated in the specification, it must be installed on an aluminum plate or metal housing. The recommended aluminum plate dimensions are shown in the figure below (unit: mm). Furthermore, the product must be securely mounted to the center of the aluminum plate with screws and coated with thermal grease to aid heat dissipation.

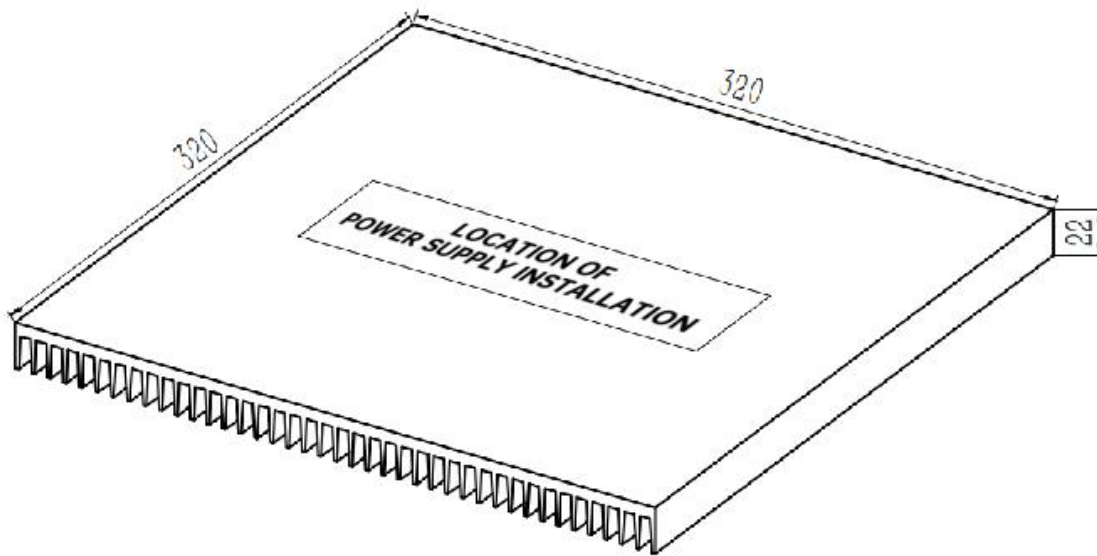

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com