

**FEATURES :**



- Universal Input 90~264VAC
- High Efficiency Up To 90%
- Protection: Short Circuit /Over load/ Over Voltage
- Fully Encapsulated Plastic Case
- 3 Years Warranty
- ROHS Compliant

Specifications typical at TA=25°C, nominal input voltage and rated output current unless otherwise specified

Part Number	Output Wattage	Output Voltage	Output Current	Ripple & Noise	Efficiency
	(W)	(VDC)	(mA)	(mV) max(Note)	(%TYP)
GA25D-S03	16.5	3.3	5000	100	80
GA25D-S05	20.0	5	4000	100	82
GA25D-S06	24.0	6	4000	100	82
GA25D-S07	21.0	7	3000	100	83
GA25D-S08	24.0	8	3000	100	84
GA25D-S09	22.5	9	2500	100	84
GA25D-S10	25.0	10	2500	150	86
GA25D-S12	25.0	12	2100	150	86
GA25D-S13	26.0	13	2000	150	86
GA25D-S14	26.0	14	1850	150	86
GA25D-S15	26.0	15	1750	150	86
GA25D-S16	26.0	16	1625	150	86
GA25D-S18	26.0	18	1450	150	87
GA25D-S24	26.4	24	1100	240	88
GA25D-S27	27.0	27	1000	240	88
GA25D-S36	27.0	36	750	240	88
GA25D-S48	27.0	48	560	240	90

Input Specifications

Parameters	Conditions		Min	Typ	Max	Units
Rated Input Voltage	Vo, Io nom		100~240			Vac
Voltage Range	Vo, Io nom	AC in	90		264	Vac
		DC in	120		370	Vdc
Line Frequency	Vi nom, Io nom		47	50/60	63	Hz

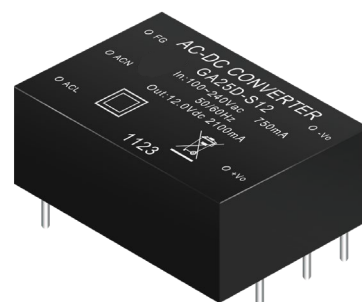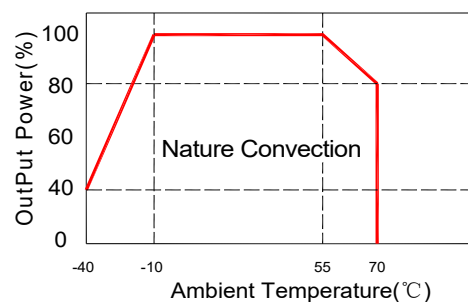Volgen**AC-DC Converter****GA25D SERIES****20~27Watt****3KVac Isolated****Single Output****Module****Temperature Derating Graph****CONTACT US**

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen

Output Specifications

Parameters	Conditions	Min	Typ	Max	Units
Output Voltage Accuracy	Vi nom, Io nom	3.3V...9V Models		±3	%
		10...48V Models		±2	%
Minimum Load	Vi nom	0			%
Line Regulation	Io nom, Vi min...Vi max		±0.2		%
Load Regulation	Vi nom, Io min...Io nom	3.3V Models	±1.0		%
		5...48V Models	±0.5		%
Transient Recovery time	Vi nom, Io nom = $\leftrightarrow$ 0.5 Io nom		1000		us
Protection	Over load	Above 110% rated output power Protection type: Recovers automatically after fault condition is removed			
	Short circuit	Recovers automatically after fault condition is removed			
	Over Voltage	120%-150% rated output Voltage Protection type: Zener diode clamp			

Note : Ripple & noise is measured by using 20 MHz bandwidth, measured with a 47uf paralleled with a high-frequency 0.47uf capacitor across each output by full load.

General Specifications


Parameters	Conditions	Min	Typ	Max	Units
Switching Frequency	Vi nom, Io nom		65		KHz
Isolation Voltage	Input / Output	3KVac/ 5mA/5Secs			
Isolation Resistance	Input / Output, @500Vdc	100			MΩ
Operating Temperature	Refer to Temperature Derating Graph	-40		+70	°C
Storage Temperature	Non Operational	-40		+105	°C
Relative Humidity	Vi nom, Io nom			95	% RH
Safety Standards	Design refer to UL62368-1, IEC62368-1				
EMI Conduction & Radiation	EN55032, CLASS B (See Fig. 1 for recommended circuit)				
EMS Immunity	EN61000 (See Fig. 1 for recommended circuit)				
Dimension	L69.85x W48.01 x H23.37mm				
Cooling	Free air convection				

Part Number


GA25D	-	S	05
A		B	C

A : Series
B : Single Output
C : Output Voltage

Parallel Lines Measure

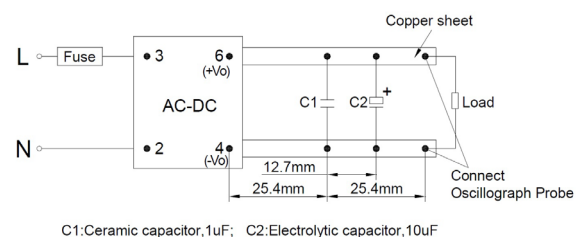


EMC solution-recommended circuit

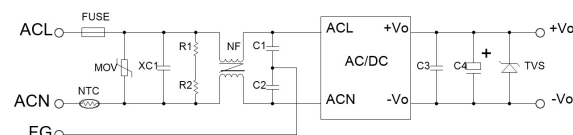

NOTE:
MOV: 10D471K
XC1: 0.22uF/275V, X2
R1/R2: 750K, 1206
NF: UU9.8, 30mH
C1/C2: 470pF/250V, Y2
NTC: MOSP005M-5
FUSE: 3.15A/250V

Fig. 1

Markings and Dimensions

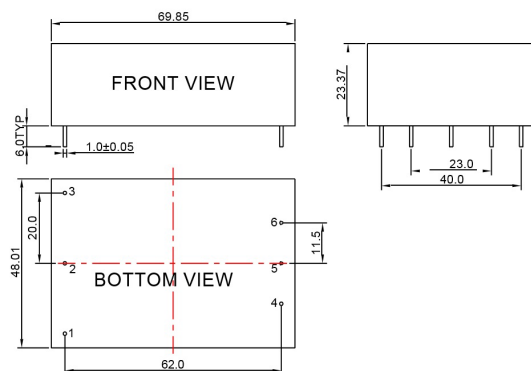

PIN	Model
1	NC
2	ACN
3	ACL
4	-Vo
5	NO PIN
6	+Vo

Unit:mm Unless otherwise specified, all tolerances are ±0.50

CONTACT US

KAGA FEI America, Inc.
2349 Bering Drive
San Jose, CA 95131

Phone: (408) 570-0955
Fax: (408) 570-0186
Toll Free: (888) 2 - VOLGEN

www.volgen.com
Email: information@volgen.com

Volgen