

APPROVAL SHEET

CUSTOMER	KAGA FEI AMERICA, INC.
CUSTOMER P/N	1100-2045, Rev B
DESCRIPTION	16V/7.5A
MPN	EM11011H(4-p)
MODEL NO FOR SAFETY	EM11011H
DATE	2024-06-04
REVISION	4

APPROVED	DESIGN	PREPARE	RoHS
蔡朝豐	張紅頂	張紅頂	
CONCLUSION 判定結果	APPROVED 承認	CONDITON APP'D 有條件承認	CUSTOMER'S SIGNATURE: 客戶簽章:

EM11011H(05)/HISTORY

[illegible]

SUBJECT: SCOPE OF DOCUMENT

CONTAINS :

1-0. General Description

2-0. Input Requirements

3-0. Output Requirements

4-0. Reliability

5-0. Environment

6-0. Safety

7-0. Mechanical Characteristics

1-0. General Description

The purpose of the document is to specify a Single phase AC input, single output switching power supply. This specification is suitable for: EM11011H Series

This product is AC to DC switching power transfer device, it can provide for a 16V, 7.5 A max & 120W max DC output with constant voltage source.

This Specification defines the input, output, performance characteristics, environment, noise and safety requirement for a power supply.

2-0. Input Requirements

2-1. Input Voltage

Rated Voltage 100-240 Vac +/- 10% full range.

Normal line input 115Vac/60Hz, 230Vac/50Hz.

2-2. Input Frequency

47~63 Hz

2-3. Input Current

a. 2.0A(Max.) @ 115Vac input with full load.

b. 1.0A(Max.) @ 230Vac input with full load.

2-4. Energy saving standards:

2-4-0. Designed to meet the following standard :

CEC level VI

2-4-1. Efficiency

Efficiency 88% (avg.) normal input & 25%, 50%, 75% ,100% of max output load

2-4-2 No Load Power Consumption.

No Load Watt 0.21W at normal line input.

2-5. Configuration

3-wire AC input (Line , Neutral , FG),

2-6. Input Fuse

The hot line side of the input shall have a fuse, rating (3.15A/250V)

2-7. Inrush Current

60A at 110 Vac At cold start, maximum load.

120A at 220 Vac At cold start, maximum load.

2-8. Line Regulation

This line regulation is less than $\pm 1\%$, of rated input voltage @ full load .

2-9. Hold Up Time

10 mSec., @ Normal line, with full load.

2-10. Rise Time

50 mSec.,@ 100-240VAC input, with full load from 10% to 90% of output voltage.

2-11. Turn-ON Time

The output voltage should rise to 90% of rated output voltage in less than 3 SEC.
from AC apply to 110Vac start up.

2-12. Harmonic Standard and Power Factor

The adapter complied with IEC 61000-3-2 class D harmonic standard while input power over than 75W. The P.F. shall >0.95 @100Vac input and >0.9 @240Vac input.

3-0. Output Requirements

3-1. Output Voltage and Current

Output Voltage (Vdc)	Current Min.(A)	Current Max.(A)
+16V	0	7.5 A

3-2. Load Regulation

Voltage (Vdc)	Tolerance (%)	Voltage range(Vdc)
+16V	+5/, -5	15.2V—16.8V

3-3. Dynamic Load Regulation

±5% excursion for 50% - 100% or 100% - 50% load change of DC output at
any frequency up to 1KHz(duty 50%)

3-4. Ripple & Noise

The power supply shall not exceed the following limits on the indicated voltage for 60Hz or 50Hz ripple, Switching frequency ripple and noise and dynamic load variations measured with a 20MHz bandwidth

Output	Ripple/Noise
+16V	1.5% max. of rated output voltage

Input condition : for rated voltage , Output condition : for max load

Ripple / Noise: 60Hz ripple + switching ripple and noise

Ripple & Noise are measured at the end of output cable which are added a 0.1uF ceramic capacitor and a 47uF electrolytic capacitor

3-5. Over Voltage Protection

150% Max. of rated voltage.

The output voltage shall be shutdown and latch-off when OVP occurred.

3-6. Over Current Protection

110%-150% of rated output current.

The adapter can withstand continuous short at DC output and no damage.

It will enter into normal condition if the fault condition is removed.

3-7. Stability

2% Max. at constant load with constant input (after 30 minutes of operation).

3-8. Temperature Rise

Less than 45 °C on top/bottom case at normal AC input & 80% load of DC output at environment temperature 25 °C.

3-9. Drop-out (Power Line Disturbance)

Output voltage shall remain within the specified regulation range, through the absence of a line input during 1/2 cycle, at full load and normal AC line input

3-10. Voltage Isolation

The DC ground will be isolated from the AC neutral and AC line.

4-0. Reliability

4-1. MTBF (MIL-HDBK-217F)

The power supply shall be designed and produced to have a mean time between failure (MTBF) of 100,000 hours at 25 degrees C.

5-0. Environment

5-1 Temperature

a. Operating : 0 to 40 °C

b. Storage : -20 to 85 °C

5-2 Humidity

a. Operating : 10% to 90 %

b. Storage: 5% to 90 %

5-3 Altitude

From sea level to 5,000 Meter (operation) and 5,000 Meter (non operation)

6-0. Safety

6-1. Hi-Pot Test

1800Vac 5mA 2 Sec between primary and secondary circuit

6-2. Insulation Test

500Vdc, 3Sec. between primary and secondary circuit

IR should 50 M Ω .

6-3. Leakage Current

100uA at 240Vac/50 Hz

6-4. Safety

UL/CUL, TUV, CB, CE, FCC

6-5. EMS

Items	Specification	Reference
ESD	Contact: $\pm$ 8KV	IEC 61000-4-2
	Air: $\pm$ 15KV	
RS	Frequency: 80~1000MHz Field Strength: 10V/M , 80% AM(1KHz)	IEC 61000-4-3
EFT	+/- 2.0 KV on input AC power ports.	IEC 61000-4-4
SURGE	Line to Line: $\pm$ 1KV (peak)	IEC 61000-4-5
	Line to F.G : $\pm$ 2KV (peak)	

6-6. EMI

Comply with Standards
EN 55011 Class B

7-0. Mechanical Characteristics

7-1. Physical Size : 137mm (L) * 59 mm (W) * 34 mm (H)

7-2. Enclosure material : 94V-0 minimum

7-3. Output Cable (Reference) : UL1866 #14

7-4. Vibration Test

The vibration frequencies are set at 20Hz, with total amplitude of 1.5mm
Along the 3 directions namely X-Y-Z. The each direction should be vibrated
for 60 minutes, after testing no abnormal electrical or mechanical should occur.

7-5. Drop Test (Referencing to CSA C22.2 No.950/UL1950/UL1310/EN60950)

Products shall be dropped from a height of 900 mm onto a horizontal surface
consists of hardwood at 13mm thick, mounted on two layers of plywood each
19mm to 20mm thick, all supported on a concrete or equivalent non-resilient
floor. Upon conclusion of test, the equipment need not be operational.

7-6. Net Weight (Reference) : 450 g

Volgen

Kaga Electronics(USA) Inc.

Medical AC Adapter

Model: EM11011H

P/N:1100-2045, Rev B

Input: 100-240V~, 2.0-1.0A, 50-60Hz

Output: 16.0V===7.5A 120.0W

S/N:YYWWXXXXXX

Kaga Electronics (USA) Inc.



RoHS

MADE IN CHINA
2312611010017 C3

41

71




3.5

53

P/N.: 312611010017
Background: Black color
Character: Silver color
Unit: mm



tuv-sud.com/->tuvsud.com/

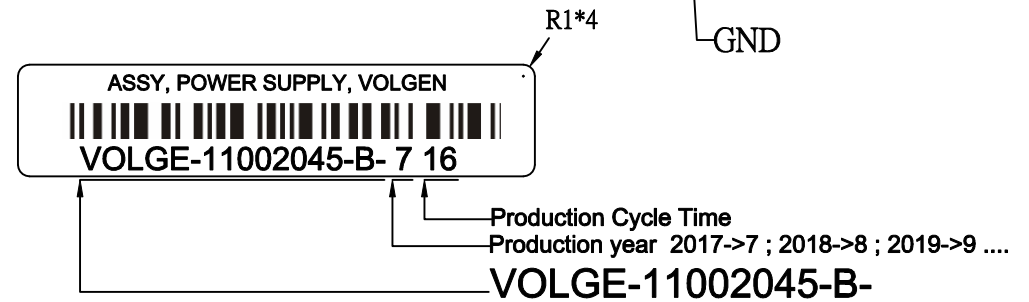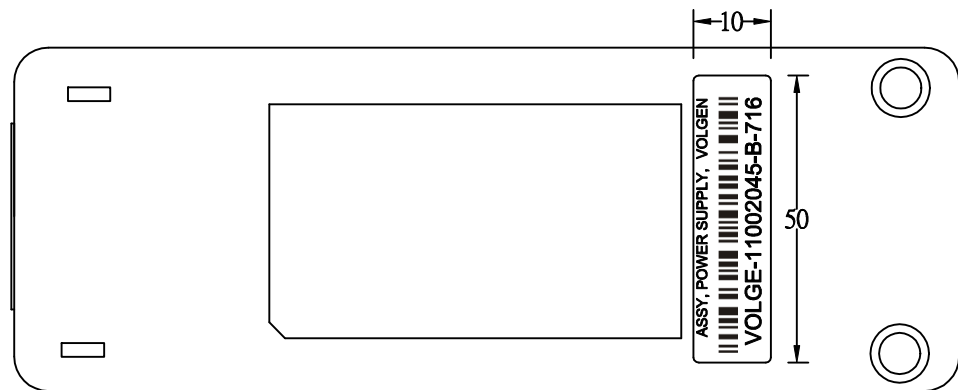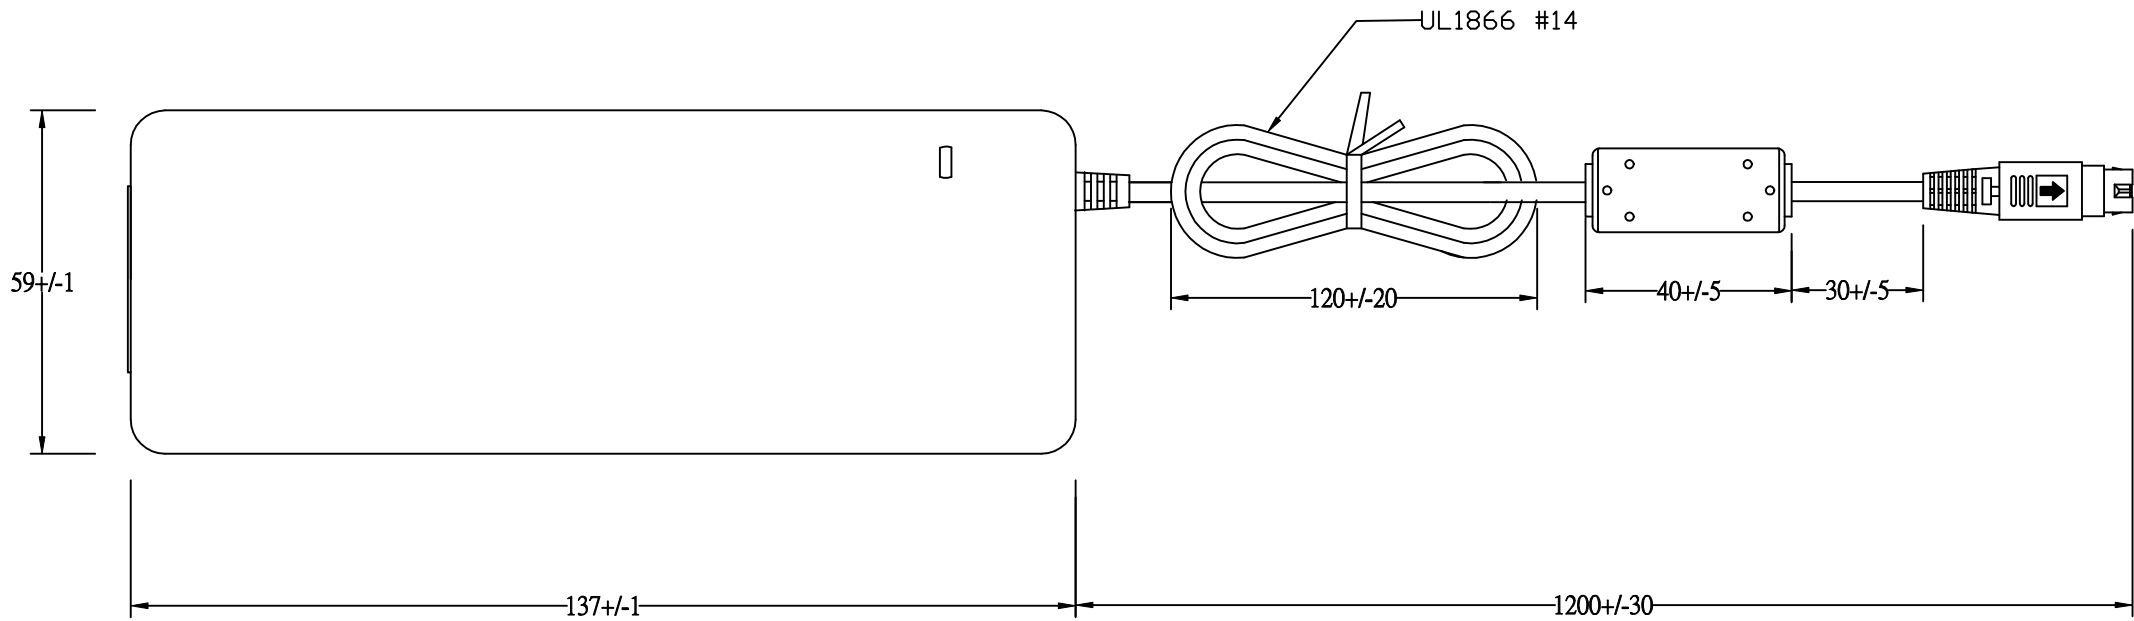

				APPROVED
MODEL	EM11011H(05)	UNIT	mm	DESIGNED
color	Black	SCALE		CHECK
cus.		DATE	2024-06-04	DRAWING L.J.YU